

共筑百年名企

全力打造享誉全球的自动化设备生产商！



东莞市壹星自动化设备有限公司

DONGGUAN YIXING AUTOMATION EQUIPMENT CO., LTD



半自动贴标机 | 自动贴标机 | 定制型贴标机 | 视觉贴标机 | 打印贴标机
桌面式贴胶机 | 落地式贴胶机 | 各类型定制贴胶机 | 包装机 | 组装机等等



联系人: Chen Xueyu



电话: +86 18824346098



地址: Yixing, 4th Floor, Damaozi Cultural and Creative Park Center,
Shipai Town, Dongguan City, Guangdong Province, P.R. China



邮编: 523330



<https://primelabeler.com/>

诚信求实 技术先行 追求卓越 与时俱进



目录 CATALOGUE

	一 公司简介 COMPANY PROFILE	
	东莞市壹星机械有限公司简介.....	02
	东莞市壹星机械有限公司企业文化	03
	二 资质证书 QUALIFICATION CERTIFICATE	
	东莞市壹星机械有限公司CE证书.....	05
	三 贴胶机产品简介 PRODUCT INTRODUCTION OF GLUE PASTING MACHINE	
	贴胶机产品简介	07-14
	四 贴标机产品简介 PRODUCT INTRODUCTION OF GLUE PASTING MACHINE	
	贴标机产品简介	16-47
	五 非标定制机型简介 INTRODUCTION TO NON-STANDARD CUSTOMIZED MODELS	
	非标定制机型产品简介	48-53



东莞市壹星自动化设备有限公司

DONGGUAN YIXING AUTOMATION EQUIPMENT CO., LTD

东莞市壹星自动化设备有限公司坐落于广东省东莞市石排镇，是一家集自动化设备的研发、生产、销售、维护为一体的大型企业。

公司占地面积3000平米，拥有大型生产基地，并配备了先进的全自动进口生产设备及完善的检测设施，已具备规模化创新、开发、生产、经营能力，目前公司旗下产品涵盖灌装机、贴标机、贴胶机、包装机、自动化生产线、组装机、分拣机、自动锁螺丝机、焊锡机等设备，产品质量稳定可靠，均符合国家各项检测标准，广泛应用于日化、五金、电子、食品、电商、化工、印刷等行业领域。依托雄厚的技术实力、科学的管理方法和完善的质量管理体系，销售范围立足国内，并远销欧美、澳洲、东南亚等全球众多国家和地区，迄今为止，已与众多国内外客户建立了长期稳定的业务关系，并赢得了广大客户的信赖和一致好评。

公司积极实施“人才发展战略”，不断吸纳行业优秀人才，组成了管理部、研发部、生产部、销售部、售后部等完善的组织框架，全体员工秉承“专业化、人性化、客户化”的服务精神，充分发挥人才、技术、装备、管理、资金等综合优势，恪守“质量第一、信誉至上、顾客为本、服务立足”的企业管理方针，形成了一套严格的、规范化的管理体系，时刻关注国际市场和客户的需求变化，不断进行设备创新和服务改进，力求为客户提供高性价比、标准化及高性能自动化设备和优良的服务方案。

信誉源于实力，口碑来自真诚。未来，东莞市壹星自动化设备有限公司将坚持走自主创新之路，大力投入资源，不断壮大经营能力，努力将公司发展成为技术水平高、产品质量好、人员素质优且享誉国际的自动化设备领域知名提供商。我们诚挚希望，与社会各界朋友真诚合作、共谋发展、共创辉煌！

【企业文化】

愿 景：共筑百年名企，全力打造享誉全球的自动化设备生产商！

使 命：把员工做成伙伴，把顾客做成朋友，

把产品做精做细，把品牌做大做强！

战略目标：做专、做精、做长，求稳、求进、求变。

核心价值：创新·责任·务实·开拓·创新·进取

经营理念：诚信求实、技术先行、追求卓越、与时俱进。

企业精神：团结、挚诚、专注、感恩、激情、拼搏。

服务理念：初心、诚心、耐心、用心、细心、匠心。

人才理念：用人唯贤、待人唯诚、知人善任、唯才是举。

工作理念：尽心竭力、精益求精、勤思善学、砥砺前行。

生产理念：安全第一、匠心匠技、保质保量、笃行负责。

PART.
01

COMPANY PROFILE

公司简介





QUALIFICATION CERTIFICATE

资质证书



技术先行 追求卓越
Technology first, pursuit of excellence

شهادة | 인증서입니다 | 証明書 | 证书 | CERTIFICATO | ZERTIFIKAT | CERTIFICADO | CERTIFICATE



CERTIFICATE

Certificate No: BGTC20230525-09

Applicant: DONGGUAN YIXING AUTOMATION EQUIPMENT CO., LTD
Name, address: 6th Floor, Jingliang Industrial Park, Xiangxi Industrial Zone, Shipai Town, Dongguan City, China
Manufacturer: DONGGUAN YIXING AUTOMATION EQUIPMENT CO., LTD
Name, address: 6th Floor, Jingliang Industrial Park, Xiangxi Industrial Zone, Shipai Town, Dongguan City, China
Product: Labeling machine
Trademark: 
Type / Models: T-102, T-302, T-303, T-306, T-305, T-307, T-602, T-603, T-512, T-702, T-901, T-103, T-502, T-503, T-203, T-202, T-705, T-703, T-704, T-205, T-505, T-504, T-501
Related Directives and Annex: 2006/42/EC Machinery Directive
2014/35/EU Low Voltage Directive
Related Standards: EN ISO 12100:2010
EN 60204-1:2018
Technical file: EC2305111008S, EC2305111008M
Comments:

This certificate is provided to the applicant on the basis of the information provided by the manufacturer or the applicant, and it gives to the applicant the right to use and affix the ECTI CERT Mark on their products accordingly to the ECTI CERT regulation for voluntary certification about its release and its use. The latest revision of the Regulation is available and can be downloaded from the website www.ecti-bg.com. Therefore, it does not imply any assessment on the safety and compliance of the product, or the production process of this product by ECTI CERT.

CE marking is only used on the product if all the relative EU Directives or Regulations are complied with. EC Declaration of Conformity and the technical documents are prepared by the manufacturer or its applicant who puts the product on the market.



25/May/2023

Date of Issue

Manager

The validity of this certificate (3 years from the date of issue) can be checked on the ECTI CERT Homepage.

Any alteration or duplication of this document in parts is subject to approval by ECTI CERT Ltd.

ECTI CERT Ltd.
Office 729, 133 Tsarigradsko Shosse Blvd., Sofia, Bulgaria
www.ecti-bg.com

Tel.: +359 878 87 75 77
E-mail: info@ecti-bg.com

技术先行 追求卓越
Technology first, pursuit of excellence

QUALIFICATION CERTIFICATE
资质证书



PART.
03

贴胶机产品简介

PRODUCT INTRODUCTION OF GLUE PASTING MACHINE



落地式胶头旋转贴胶机
Floor-standing glue head rotary gluing machine

贴胶机产品简介
PRODUCT INTRODUCTION OF GLUE PASTING MACHINE

基本用途

BASIC USE

应用吸附的方式或夹具的方式把产品固定在平台上，
实现在物体贴双面胶、3M胶、透明胶、高温胶带等功能，
适用范围广泛，适合不同的贴胶尺寸。

以下为标准机型技术参数，其它特殊要求可以定制。

机器原理：

产品放机台上，胶头旋转贴胶，实现多条横贴竖贴功能

The product is fixed on the platform by adsorption or fixture, so as to realize the functions of applying double-sided adhesive, 3M adhesive, transparent adhesive, high-temperature adhesive tape, etc. to the object. It has a wide range of applications and is suitable for different adhesive sizes.

The following are the technical parameters of standard models, other special requirements can be customized

MACHINE PRINCIPLE:

The product is placed on the machine table, and the glue head is rotated and pasted to realize multiple horizontal and vertical pasting functions

设备参数

EQUIPMENT PARAMETERS

贴胶精度：±1mm (不含产品、标签误差)

贴胶速度：500mm/s (与产品、标签尺寸有关)

适用产品尺寸：贴胶行程500*1000，需30mm以上长度可贴

适用胶带范围：宽度 (底纸宽度) 3-50mm，

料盘内径76mm，外径250mm

整机尺寸：约1300mm×800mm×1500mm (长×宽×高)

整机电源：220V/50HZ

整机重量：220Kg

Adhesive accuracy: ± 1 mm (excluding product and label errors)

Adhesive speed: 500mm/s (related to product and label size)


Applicable product size: the gluing stroke is 500 * 1000, and the length of more than 30mm can be pasted

Applicable tape range: width (backing paper width) 3-50mm, inner diameter of tray 76mm, outer diameter 250mm

Complete machine size: about 1300mm × 800mm × 1500mm (length × width × height)

Power supply: 220V/50HZ

Complete machine weight: 220 Kg

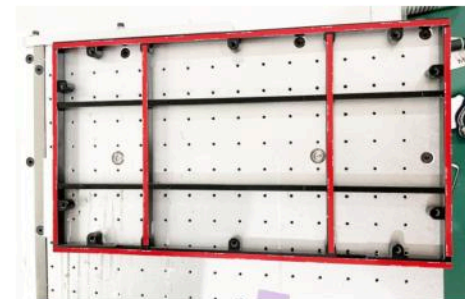

落地式两轴贴胶机

Floor-standing two-axis gluing machine



基本用途



BASIC USE

应用吸附的方式或夹具的方式把产品固定在平台上，实现在物体贴双面胶、3M胶、透明胶、高温胶带等功能，适用范围广泛，适合不同的贴胶尺寸。



机器原理：

产品放机台上，用X轴控制胶头，Y轴控制机台的平台进行移动贴胶

The product is fixed on the platform by adsorption or fixture, so as to realize the functions of applying double-sided adhesive, 3M adhesive, transparent adhesive, high-temperature adhesive tape, etc. to the object. It has a wide range of applications and is suitable for different adhesive sizes.

Machine Principle:

The product is placed on the machine table, and the X-axis is used to control the glue head and the Y-axis is used to control the platform of the machine table to move and paste glue

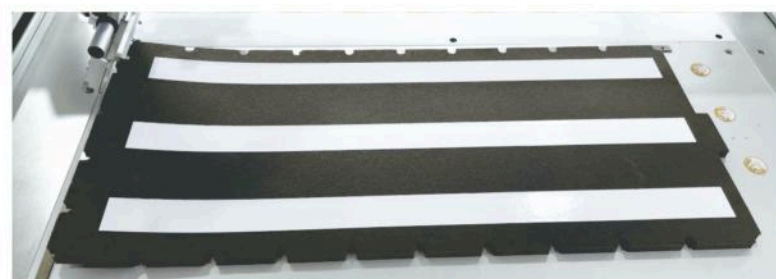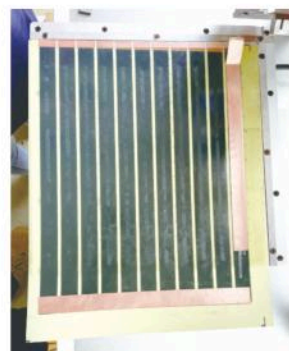

设备参数



EQUIPMENT PARAMETERS

贴胶精度：±1mm (不含产品、标签误差)
贴胶速度：500mm/s (与产品、标签尺寸有关)
适用产品尺寸：贴胶行程650*650，需30mm以上长度可贴
适用胶带范围：宽度（底纸宽度）3-50mm，
料盘内径76mm，外径250mm
整机尺寸：约1100mm×1600mm×1500mm（长×宽×高）
整机电源：220V/50HZ
整机重量：220Kg

Adhesive accuracy: ± 1 mm (excluding product and label errors)
Adhesive speed: 500mm/s (related to product and label size)
Applicable product size: the adhesive stroke is 650 * 650, and the length of more than 30mm can be pasted
Applicable tape range: width (backing paper width) 3-50mm, inner diameter of tray 76mm, outer diameter 250mm
Complete machine size: about 1100mm × 1600mm × 1500mm (length × width × height)
Power supply: 220V/50HZ
Complete machine weight: 220 Kg



落地式平台旋转撕离型纸贴胶机

Floor-standing platform rotary tear-off paper adhesive machine

基本用途



BASIC USE

应用吸附的方式或夹具的方式把产品固定在平台上，实现在物体贴双面胶、3M胶、透明胶、高温胶带等材质的贴附，可以把胶带上的离型纸或废纸收起来，适用范围广泛，适合不同的贴胶尺寸。

机器原理：

产品放机台上→边贴边收离型纸自动裁切→下料

The product is fixed on the platform by adsorption or fixture, so as to realize the attachment of double-sided adhesive, 3M adhesive, transparent adhesive, high-temperature adhesive tape and other materials on the object. The release paper or waste paper on the adhesive tape can be collected. It has a wide range of applications and is suitable for different adhesive sizes.

Machine Principle:

Place the product on the machine table → collect and release paper while welting, automatic cutting → blanking




设备参数



EQUIPMENT PARAMETERS

贴胶精度：±1mm (不含产品、标签误差)
贴胶速度：500mm/s (与产品、标签尺寸有关)
适用产品尺寸：贴胶行程650*650
适用胶带范围：宽度（底纸宽度）3-50mm，
料盘内径76mm，外径250mm
整机尺寸：约1100mm×1600mm×1500mm（长×宽×高）
整机电源：220V/50HZ
整机重量：220Kg

Adhesive accuracy: ± 1 mm (excluding product and label errors)
Adhesive speed: 500mm/s (related to product and label size)
Applicable product size: Adhesive stroke 650 * 650
Applicable tape range: width (backing paper width) 3-50mm, inner diameter of tray 76mm, outer diameter 250mm
Complete machine size: about 1100mm × 1600mm × 1500mm (length × width × height)
Power supply: 220V/50HZ
Complete machine weight: 220 Kg

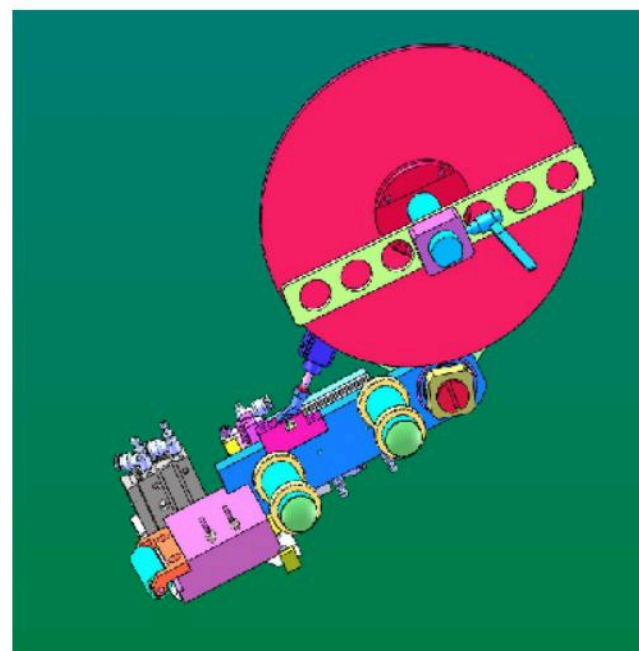


不撕离型纸胶头

Non tearing release paper adhesive head



撕离型纸胶头

Tear off paper adhesive head

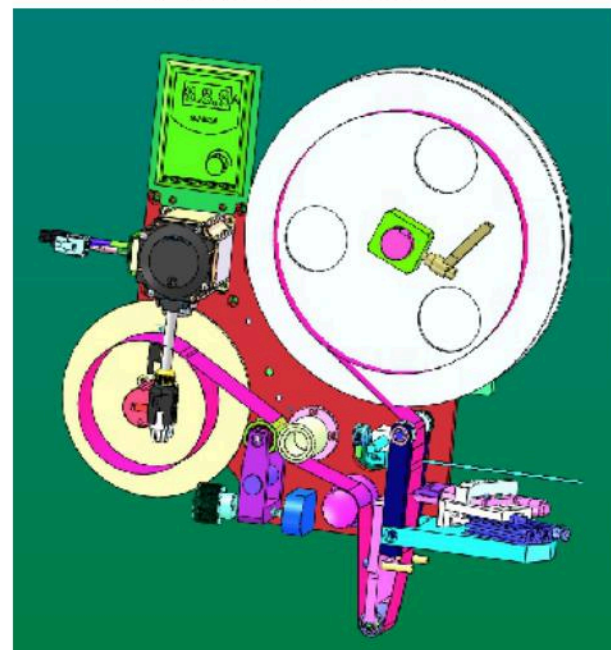

基本用途



BASIC USE

客户根据不同需求，选择对应的胶头进行配套使用

设备参数



EQUIPMENT PARAMETERS

贴胶精度：±1mm (不含产品、标签误差)
贴胶速度：500mm/s (与产品、标签尺寸有关)
适用胶带范围：宽度 (底纸宽度) 3-50mm，
料盘内径76mm，外径250mm
整机尺寸：约600mm×300mm×500mm (长×宽×高)
整机重量：8Kg

Basic Use


Customers choose the corresponding rubber head for matching use according to different needs

Equipment parameters:

Adhesive precision: ± 1mm (excluding product and label errors)
Adhesive speed: 500mm/s (depending on product and label size)
Applicable tape range: Width (base paper width) 3-50mm, inner diameter of tray 76mm, outer diameter 250mm
Overall dimensions: approximately 600mm x 300mm x 500mm (length x width x height)
Whole machine weight: 8Kg

收废料胶头

Charging material rubber head

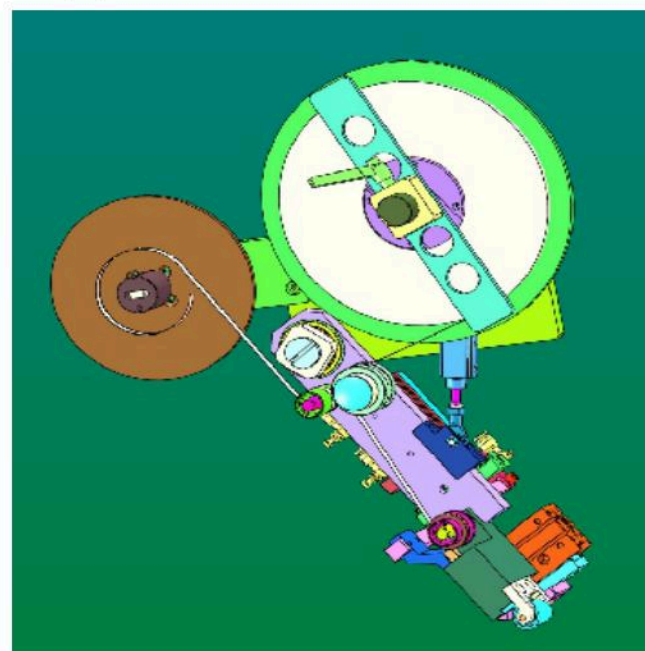

基本用途



BASIC USE

应用吸附的方式或夹具的方式把产品固定在平台上，
实现在物体贴双面胶、3M胶、透明胶、高温胶带等功能，
适用范围广泛，适合不同的贴胶尺寸。

工作原理：

产品放机台上，用X轴控制胶头前后移动贴胶，YZ轴
控制左右移动贴胶

The product is fixed on the platform by adsorption or fixture, so as
to realize the functions of applying double-sided adhesive, 3M
adhesive, transparent adhesive, high-temperature adhesive tape, etc.
to the object. It has a wide range of applications and is suitable for
different adhesive sizes.

How it works:

When the product is placed on the machine table, the X-axis is
used to control the glue head to move forward and backward for gluing,
and the YZ-axis is used to control the left and right movement for
gluing




设备参数



EQUIPMENT PARAMETERS

贴胶精度：±1mm (不含产品、标签误差)
贴胶速度：500mm/s (与产品、标签尺寸有关)
适用产品尺寸：此设备属于定制款
适用胶带范围：宽度 (底纸宽度) 3-50mm，
料盘内径76mm，外径250mm
整机尺寸：约1500mm×1600mm×1500mm (长×宽×高)
整机电源：220V/50HZ
整机重量：220Kg

Adhesive accuracy: ± 1 mm (excluding product and label errors)
Adhesive speed: 500mm/s (related to product and label size)
Applicable product size: This device is a customized model
Applicable tape range: width (backing paper width) 3-50mm, inner
diameter of tray 76mm, outer diameter 250mm
Complete machine size: about 1500mm x 1600mm x 1500mm (length
x width x height)
Power supply: 220V/50HZ
Complete machine weight: 220 Kg

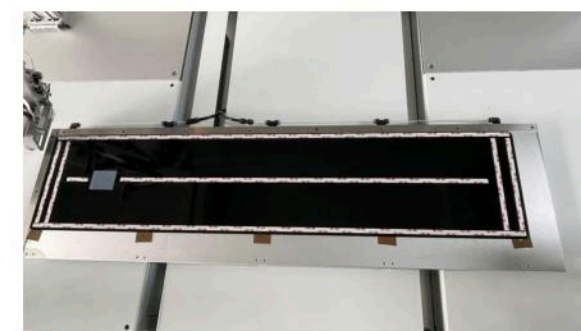

落地式三轴贴胶机

Floor-standing three-axis gluing machine



双胶头磁吸下料贴胶机

Double glue head magnetic suction blanking gluing machine



基本用途



BASIC USE

适用不平整放不稳的产品平面贴胶，如双面胶、3M胶、透明胶、高温胶带等材质，此设备为定制款。

工作原理：

手动上料到夹具→进行4条胶带同时贴胶→磁吸下料→另一个胶头贴好胶带→磁吸通过模组移动进行下料

It is suitable for flat adhesive of uneven and unstable products, such as double-sided adhesive, 3M adhesive, transparent adhesive, high-temperature adhesive tape and other materials. This equipment is customized.

Working principle:

Manually load to the fixture → paste 4 tapes at the same time → magnetically blank → paste the tape with another glue head → magnetically blank through the module movement



设备参数



EQUIPMENT PARAMETERS

贴胶精度：±1mm (不含产品、标签误差)

贴胶速度：500mm/s (与产品、标签尺寸有关)

适用产品尺寸：此设备属于定制款

适用胶带范围：宽度 (底纸宽度) 3-50mm,

料盘内径76mm, 外径250mm

整机尺寸：约2000mm×1600mm×1500mm (长×宽×高)

整机电源：220V/50HZ

整机重量：260Kg

Adhesive accuracy: ± 1 mm (excluding product and label errors)

Adhesive speed: 500mm/s (related to product and label size)

Applicable product size: This device is a customized model

Applicable tape range: width (backing paper width) 3-50mm, inner diameter of tray 76mm, outer diameter 250mm

Complete machine size: about 2000mm × 1600mm × 1500mm (length × width × height)

Power supply: 220V/50HZ

Complete machine weight: 260 Kg



基本用途



BASIC USE

应用吸附的方式或夹具的方式把产品固定在平台上，实现在物体上贴胶，如双面胶、3M胶、透明胶、高温胶带等材质，适应范围广泛。


工作原理：

手动上料→胶带贴合好后自动裁切→手工下料 (如需要自动上下料，支持客户定制)

The product is fixed on the platform by adsorption or fixture to achieve adhesive on objects, such as double-sided adhesive, 3M adhesive, transparent adhesive, high-temperature adhesive tape and other materials, which have a wide range of applications.

Working principle:

manual loading → automatic cutting after the tape is attached → manual blanking (if automatic loading and unloading are required, customer customization is supported)

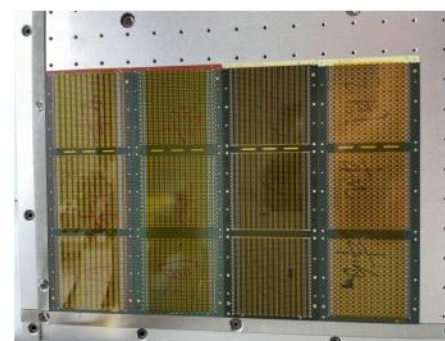

桌面式贴胶机

Desktop adhesive machine



设备参数



EQUIPMENT PARAMETERS

贴胶精度：±1mm (不含产品、标签误差)

贴胶速度：500mm/s (与产品、标签尺寸有关)

适用产品尺寸：贴胶行程300*300, 需30mm以上长度可贴

适用胶带范围：宽度 (底纸宽度) 5-50mm,

料盘内径76mm, 外径250mm

整机尺寸：约800mm×800mm×720mm (长×宽×高)

整机电源：220V/50HZ

整机重量：78Kg

Adhesive accuracy: ± 1 mm (excluding product and label errors)

Adhesive speed: 500mm/s (related to product and label size)

Applicable product size: the gluing stroke is 300 * 300, and the length of more than 30mm can be pasted

Applicable tape range: width (backing paper width) 5-50mm, inner diameter of tray 76mm, outer diameter 250mm

Complete machine size: about 800mm × 800mm × 720mm (length × width × height)


Power supply: 220V/50HZ

Complete machine weight: 78 Kg



流水线式贴胶机

Assembly line adhesive machine

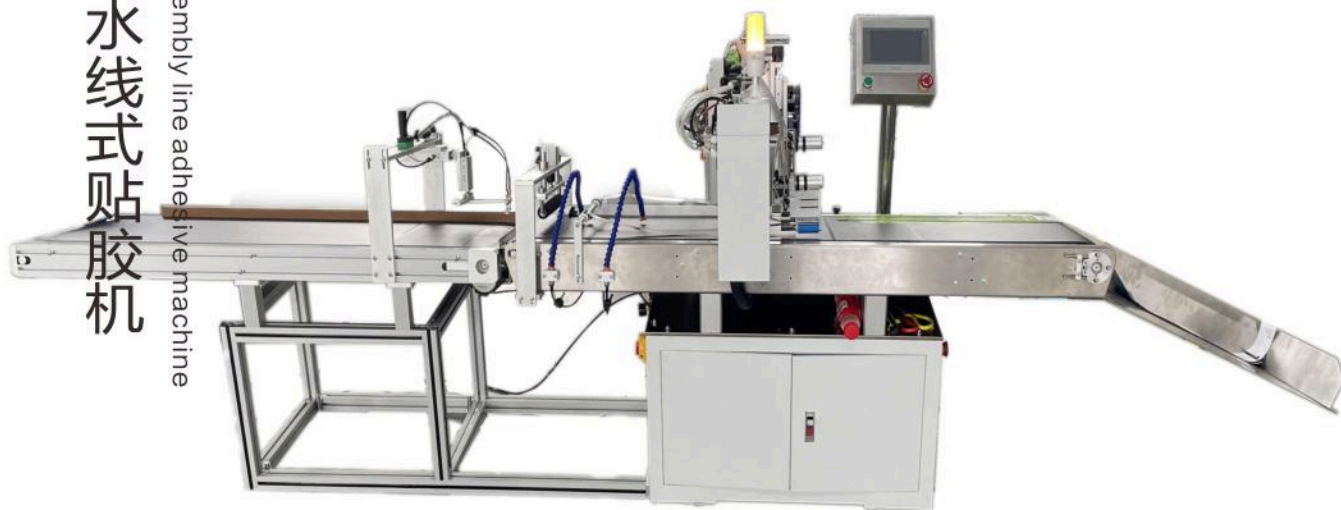

基本用途



BASIC USE

适用平整的产品平面贴胶，可以加自动分料功能，此设备可以贴双面胶、3M胶、透明胶、高温胶带等材质的胶带，适用范围广泛。

工作原理：

产品上料→自动裁切胶带→贴合→下料

It is suitable for flat product flat gluing, and can add automatic material separation function. This equipment can apply double-sided adhesive, 3M adhesive, transparent adhesive, high-temperature adhesive tape and other materials, and has a wide range of applications.

Working principle:

product loading → automatic tape cutting → laminating → blanking

设备参数



EQUIPMENT PARAMETERS

贴胶精度：±2mm (不含产品、标签误差)

贴胶速度：500mm/s (与产品、标签尺寸有关)

适用产品尺寸：此设备属于定制款

适用胶带范围：宽度 (底纸宽度) 3-50mm,

料盘内径76mm, 外径250mm

整机尺寸：约1500mm×780mm×1400mm (长×宽×高)

整机电源：220V/50HZ

整机重量：150Kg

备注：支持各种尺寸的定制

Adhesive accuracy: ± 2 mm (excluding product and label errors)

Adhesive speed: 500mm/s (related to product and label size)

Applicable product size: This device is a customized model

Applicable tape range: width (backing paper width) 3-50mm, inner

diameter of tray 76mm, outer diameter 250mm

Complete machine size: about 1500mm × 780mm × 1400mm (length × width × height)

Power supply: 220V/50HZ

Complete machine weight: 150 Kg

Remarks: Support customization of various sizes




诚信求实
技术先行
追求卓越
与时俱进

Semi-automatic round bottle labeling machine

半自动圆瓶贴标机



A 电气结合款

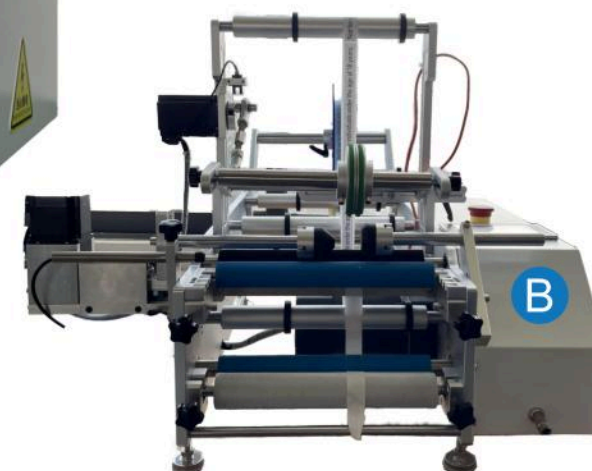

B 全电动款

基本用途 BASIC USE

半自动圆瓶贴标机客户市场需求，分电气结合款和全电动款，有空压机的客户可以选择电气结合款，没有空压机的客户选择全电动款会更方便，设备适用于圆柱形产品贴标，如木糖醇瓶、化妆瓶、医药瓶、化工瓶等，可选单标、双标功能，双标的间距可以任意调整。可选用圆周定位检测装置，实现圆周定点贴标。可选配色带打码机，在标签上打印生产批号日期等信息，实现打日期贴标一体完成，减少工序，提高生产效率。

工作原理：

产品躺着放在设备上，贴一个拿一个，重复操作，有自动感应贴和脚踩两种功能。

Customer market demand for semi-automatic round bottle labeling machines is divided into electrical combination models and all-electric models. Customers with air compressors can choose electrical combination models. Customers without air compressors will be more convenient to choose all-electric models. The equipment is suitable for cylindrical product labeling, such as xylitol bottles, cosmetic bottles, medical bottles, chemical bottles, etc., with optional single label and double label functions, and the spacing between double labels can be adjusted arbitrarily. Circumferential positioning detection device can be selected to realize circumferential fixed-point labeling. The optional ribbon coding machine can print the production batch number date and other information on the label, so as to realize the integrated completion of date and labeling, reduce the process and improve the production efficiency.

Working principle: The product is placed on the equipment lying down, stick one and take one, and the operation is repeated. It has two functions: automatic induction sticking and foot stepping.



设备参数 EQUIPMENT PARAMETERS

贴标精度：±0.5mm (不含产品、标签误差)
贴标速度：15-30个/分钟 (与产品、标签尺寸有关)
适用产品直径：φ10mm~120mm
适应标签尺寸：长度20mm-400mm
宽度 (底纸宽度) 20mm-220mm
整机尺寸：约920mm×480mm×500mm
整机电源：220V/50HZ
整机重量：45Kg
备注：超过设备参数范围可定制。

Labeling accuracy: ± 0.5 mm (excluding product and label error)
Labeling speed: 15-30 pcs/min (related to product, label size)
Applicable product diameter: φ 10mm ~ 120mm
Adaptable label size: length 20mm-400mm
Width (backing paper width) 20mm-220mm
Complete machine size: about 920mm × 480mm × 500mm
Power supply: 220V/50HZ
Complete machine weight: 45 Kg
Remarks: It can be customized if it exceeds the range of equipment parameters.

PART.
04

贴标机产品简介 Introduction to Labeling Machine Products

全自动定位式圆瓶贴标机

Fully automatic positioning round bottle labeling machine



基本用途



BASIC USE

适用于较大规格且能站立的圆柱形贴标，如木糖醇瓶、化妆瓶、医药瓶、化工瓶、酒瓶等。适合贴单标、双标功能，双标的间距可以任意调整。可实现半/全周贴标。可选用圆周定位检测装置，实现圆周定点贴标。可选配色带打码机，在标签上打印生产批号日期等信息，实现打日期贴标一体完成，减少工序，提高生产效率。

工作原理：产品立着放在设备上，输送到贴标位置，旋转一圈进行贴标再下料。

It is suitable for larger size and standing cylindrical labeling, such as xylitol bottles, cosmetic bottles, medical bottles, chemical bottles, wine bottles, etc. It is suitable for pasting single label and double label functions, and the spacing between double label can be adjusted arbitrarily. Half/full week labeling can be achieved. Circumferential positioning detection device can be selected to realize circumferential fixed-point labeling. The optional ribbon coding machine can print the production batch number date and other information on the label, so as to realize the integrated completion of date and labeling, reduce the process and improve the production efficiency.

Working principle: The product is placed upright on the device, conveyed to the labeling position, rotated once for labeling, and then discharged.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：30-60个/分钟 (与产品、标签尺寸有关)
适用产品直径：φ20mm~100mm 高度：25mm~300mm
适应标签尺寸：长度20mm-320mm
宽度 (底纸宽度) 15mm-160mm
大于标签尺寸可定做

整机尺寸：约2100mm×1100mm×1300mm

整机电源：220V/50HZ

整机重量：185Kg

备注：支持客户任意尺寸定制

Labeling accuracy: ± 1 mm (excluding product and label error)
Labeling speed: 30-60 pcs/min (related to product, label size)
Applicable product diameter: φ20mm ~ 100mm height: 25mm ~ 300mm
Adaptable label size: length 20mm-320mm
Width (backing paper width) 15mm-160mm larger than label size can be customized
Complete machine size: about 2100mm × 1100mm × 1300mm
Power supply: 220V/50HZ
Complete machine weight: 185 Kg
Remarks: Support customers to customize any size



全自动搓滚贴标机

Fully automatic rolling labeling machine

基本用途



BASIC USE

适用于较大规格且能站立的圆柱形贴标，如木糖醇瓶、化妆瓶、医药瓶、化工瓶等。适合单标。可选配色带打码机，在标签上打印生产批号日期等信息，实现打日期贴标一体完成，减少工序，提高生产效率。

工作原理：产品立着放在设备上，输送到贴标位置进行贴标，搓滚覆标后下料。

It is suitable for larger size and standing cylindrical labeling, such as xylitol bottles, cosmetic bottles, medical bottles, chemical bottles, etc. Suitable for single label. The optional ribbon coding machine can print the production batch number date and other information on the label, so as to realize the integrated completion of date and labeling, reduce the process and improve the production efficiency.

Working principle: The product is placed upright on the equipment, conveyed to the labeling position for labeling, and then discharged after the label is rolled and applied.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±2mm (不含产品、标签误差)
贴标速度：60-120个/分钟 (与产品、标签尺寸有关)
适用产品直径：φ20mm~100mm
适应标签尺寸：长度20mm-310mm
宽度 (底纸宽度) 15mm-130mm
大于标签尺寸可定做

整机尺寸：约2100mm×1100mm×1300mm


整机电源：220V/50HZ

整机重量：185Kg

Labeling accuracy: ± 2 mm (excluding product and label error)
Labeling speed: 60-120 pcs/min (related to product, label size)
Applicable product diameter: φ20mm ~ 100mm
Adaptable label size: length 20mm-310mm
Width (backing paper width) 15mm-130mm larger than label size can be customized
Complete machine size: about 2100mm × 1100mm × 1300mm
Power supply: 220V/50HZ
Complete machine weight: 185 Kg

全自动高精度贴标机

Fully automatic high-precision labeling machine

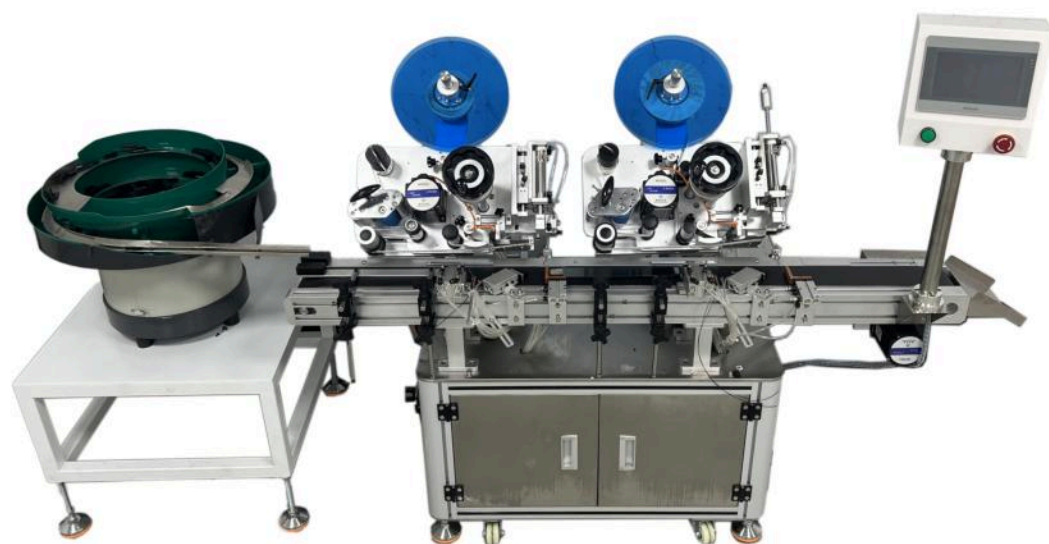

基本用途



BASIC USE

应用吸贴（真空吸气和吹气配合动作）方法贴标，可根据需求实现在物体的上平面、上下平面，或下平面贴标，如包装袋、包装盒、塑料盖、电子类产品的贴标，可选配打码机、实现在标签上打印生产日期、批号等信息。减少工序，提高生产效率。

工作原理：产品一个个放在夹具上，吸附标签对产品进行贴标。

Labeling by suction (vacuum suction and blowing combined action) can be realized on the upper plane, upper and lower planes, or lower planes of objects according to needs, such as packaging bags, packaging boxes, plastic lids, and electronic products. For labeling, an optional coding machine can be used to print the production date, batch number and other information on the label. Reduce working procedures and improve production efficiency.

Working principle: The products are placed on the fixture one by one, and the adsorption label is used to label the products.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.5mm (不含产品、标签误差)
贴标速度：25-35个/分钟 (与产品、标签尺寸有关，也跟标头个数有关)
适用产品尺寸：长度：20mm-150mm
宽度：20mm-150mm
高度：0.2mm-75mm
适应标签尺寸：长度10mm-60mm宽度（底纸宽度）8mm-70mm
大于标签尺寸可定做
整机尺寸：约1800mm×1000mm×1450mm
整机电源：220V/50HZ
适用气压：0.4~0.6Mpa
整机重量：185Kg

Labeling accuracy: ±0.5 mm (excluding product and label error)
Labeling speed: 25-35 pieces/minute (related to product, label size, and also related to the number of headers)
Applicable product size: Length: 20 mm-150 mm
Width: 20 mm-150 mm
Height: 0.2 mm-75 mm
Adaptable label size: length 10mm-60mm
Width (backing paper width) 8mm-70mm larger than label size can be customized
Complete machine size: about 1800mm × 1000mm × 1450mm
Power supply: 220V/50HZ
Applicable air pressure: 0.4 ~ 0.6 Mpa
Complete machine weight: 185 Kg



全自动卧式圆瓶贴标机

Fully automatic horizontal round bottle labeling machine



A 分瓶下料结构

B 滚式下料结构

基本用途



BASIC USE

全自动卧式圆瓶贴标机适合贴立不稳的圆柱形产品，如滤芯、口服液、西林瓶、注射器、口红管等。广泛应用于食品、化妆品、医疗行业。可选配打码机或喷码机，可实现在标签上打印生产日期、批号、喷印条码等信息。

工作原理：产品上料结构上，一个个产品分出来，进行全/半周贴标。

Fully automatic horizontal round bottle labeling machine is suitable for pasting unstable cylindrical products, such as filter elements, oral liquid, vials, syringes, lipstick tubes, etc. It is widely used in food, cosmetics, medical industry. Optional coding machine or inkjet printer, which can print the production date, batch number, inkjet barcode and other information on the label.

Working principle: In terms of product feeding structure, each product is separated and labeled for full/half week




设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：100-200个/分钟 (与产品、标签尺寸有关)
适用产品：根据客户提供样品尺寸定制
适应标签尺寸：长度6mm-250mm
宽度（底纸宽度）6mm-150mm
大于标签尺寸可定做
整机尺寸：约2000mm×780mm×1400mm
整机电源：220V/50HZ
整机重量：180Kg

Labeling accuracy: ±1 mm (excluding product and label error)
Labeling speed: 100-200 pcs/min (related to product, label size)
Applicable products: Customized according to the sample size provided by customers
Adaptable label size: length 6mm-250mm
Width (backing paper width) 6mm-150mm greater than label size can be customized
Complete machine size: about 2000mm × 780mm × 1400mm
Power supply: 220V/50HZ
Complete machine weight: 180 Kg

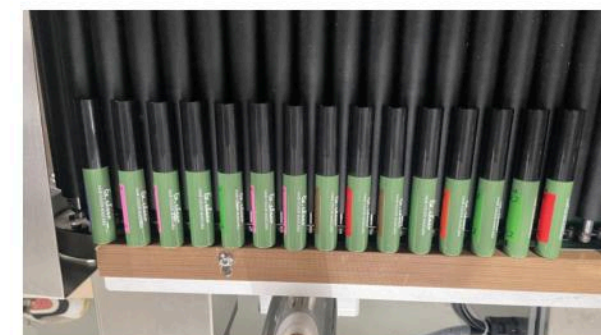

Semi-automatic flat labeling machine

半自动平面贴标机



基本用途




BASIC USE

应用吸贴（真空吸气和吹气配合动作）方法贴标，实现在物体的上平面贴标，如包装袋、包装盒、塑料盖贴标，可选配打码机、实现在标签上打印生产日期、批号等信息。减少工序，提高生产效率。

工作原理：产品一个个放在夹具上，吸附标签对产品进行贴标。

Apply the method of suction (vacuum suction and blowing) to label on the upper plane of objects, such as packaging bags, packaging boxes and plastic lids. Optional coding machine can be equipped to print production date, batch number and other information on the label. Reduce working procedures and improve production efficiency.

Working principle: The products are placed on the fixture one by one, and the adsorption label is used to label the products.

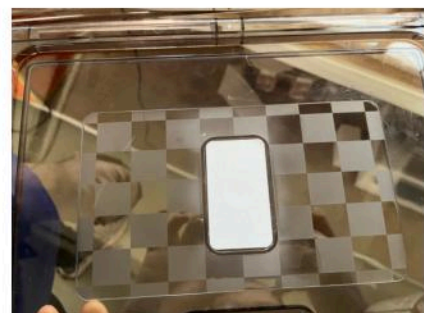

设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.5mm (不含产品、标签误差)
贴标速度：15-25个/分钟（与产品、标签尺寸有关）
适用产品尺寸：长度：20mm-200mm
宽度：20mm-200mm
高度：0.2mm-120mm
适应标签尺寸：长度15mm-100mm
宽度（底纸宽度）15mm-170mm
大于标签尺寸可定做
整机尺寸：约850mm×410mm×720mm
整机电源：220V/50HZ
整机重量：41Kg

Labeling accuracy: ± 0.5 mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product dimensions: Length: 20 mm-200 mm
Width: 20 mm-200 mm
Height: 0.2 mm-120 mm
Adaptable label size: length 15mm-100mm
Width (backing paper width) 15mm-170mm larger than label size can be customized
Complete machine size: about 850mm × 410mm × 720mm
Power supply: 220V/50HZ
Complete machine weight: 41 Kg



Semi-automatic high-precision labeling machine

半自动高精度贴标机

基本用途




BASIC USE

应用吸贴（真空吸气和吹气配合动作）方法贴标，实现在物体的上平面贴标，如包装袋、包装盒、塑料盖、电子原器件上贴标，可选配打码机、实现在标签上打印生产日期、批号等信息。减少工序，提高生产效率。

工作原理：产品一个个放在夹具上，吸附标签对产品进行贴标。

The method of suction (vacuum suction and blowing combined action) is used to label the upper plane of objects, such as packaging bags, packaging boxes, plastic covers, and electronic original devices. An optional coding machine can be used to realize Print the production date, batch number and other information on the label. Reduce working procedures and improve production efficiency.

Working principle: The products are placed on the fixture one by one, and the adsorption label is used to label the products.

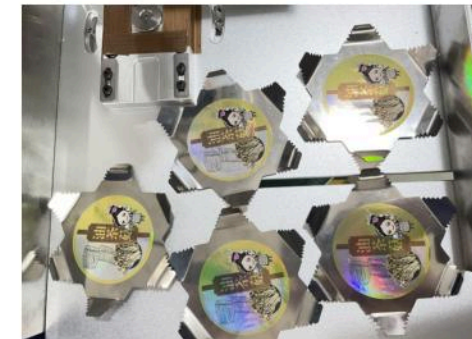

设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.3mm (不含产品、标签误差)
贴标速度：15-25个/分钟（与产品、标签尺寸有关）
适用产品尺寸：长度：20mm-200mm
宽度：20mm-180mm
高度：0.2mm-75mm
适应标签尺寸：长度10mm-60mm
宽度（底纸宽度）6mm-70mm 大于标签尺寸可定做
整机尺寸：约550mm×420mm×780mm
整机电源：220V/50HZ
适用气压：0.4~0.6Mpa
整机重量：67Kg

Labeling accuracy: ± 0.3mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product dimensions: Length: 20 mm-200 mm
Width: 20 mm-180 mm
Height: 0.2 mm-75 mm
Adaptable label size: length 10mm-60mm
Width (backing paper width) 6mm-70mm greater than label size can be customized
Complete machine size: about 550mm × 420mm × 780mm
Power supply: 220V/50HZ
Applicable air pressure: 0.4 ~ 0.6 Mpa
Complete machine weight: 67 Kg

半自动前后滚贴标机

Semi-automatic front and back rolling labeling machine



基本用途



BASIC USE

此款设备适用贴手机壳膜，标签比较大的产品贴标。用滚贴的方式避免气泡，可配色带打码机，打印生产日期，生产批号等信息，减少工序，提高生产效率。

工作原理：产品放在夹具上，用滚贴方式进行贴标。

This equipment is suitable for labeling mobile phone case film and products with relatively large labels. It can be rolled to avoid bubbles. It can be matched with a ribbon coding machine to print production date, production batch number and other information, reducing processes and improving production efficiency.

Working principle: The product is placed on the fixture and labeled by rolling.


设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.5mm (不含产品、标签误差)
贴标速度：15-25个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长度：20mm-150mm
宽度：20mm-150mm
高度：0.2mm-300mm
适应标签尺寸：长度15mm-100mm
宽度 (底纸宽度) 15mm-170mm 大于标签尺寸可定做
整机尺寸：约850mm×410mm×720mm
整机电源：220V/50HZ
整机重量：55Kg

Labeling accuracy: ± 0.5 mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product size: Length: 20 mm-150 mm
Width: 20 mm-150 mm
Height: 0.2 mm-300 mm
Adaptable label size: length 15mm-100mm
Width (backing paper width) 15mm-170mm larger than label size can be customized
Complete machine size: about 850mm × 410mm × 720mm
Power supply: 220V/50HZ
Complete machine weight: 55 Kg

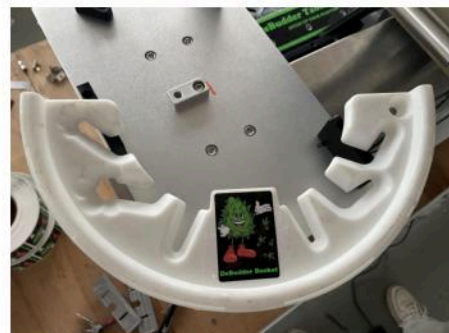

全自动平面贴标机

Fully automatic flat labeling machine



基本用途



BASIC USE

全自动平面贴标机分简易款和标准款两种，适用于各种物品的上平面贴标，如书本、文件夹、盒子、纸箱等，广泛应用于印刷、文具、食品、日化、电子、医药等行业。可选配打码机或喷码机，可实现在标签上打印生产日期、批号、喷印条码等信息。可选配喷码机到输送带，可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。减少工序，提高生产效率。

工作原理：产品一个个放在输送上，输送到贴标位置进行平面贴标

Fully automatic flat labeling machine is divided into two types: simple model and standard model. It is suitable for flat labeling of various items, such as books, folders, boxes, cartons, etc. It is widely used in printing, stationery, food, daily chemicals, electronics, medicine and other industries. Optional coding machine or inkjet printer, which can print the production date, batch number, inkjet barcode and other information on the label. Optional inkjet printer to conveyor belt, which can print the production date, batch number, bar code and other information on the product before or after labeling. Reduce working procedures and improve production efficiency.

Working principle: The products are placed on the conveyor one by one and transported to the labeling position for flat labeling



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：40-120个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长：10mm~400mm 宽：10mm~300mm 高：0.2mm~150mm
适应标签尺寸：长度6mm-250mm
宽度 (底纸宽度) 6mm-150mm 大于标签尺寸可定做
整机尺寸：约1500mm×1000mm×1350mm
整机电源：220V/50HZ

Labeling accuracy: ± 1 mm (excluding product and label error)
Labeling speed: 40-120 pcs/min (related to product, label size)
Applicable product size: length: 10mm ~ 400mm width: 10mm ~ 300mm height: 0.2 mm ~ 150mm
Adaptable label size: length 6mm-250mm
Width (backing paper width) 6mm-150mm greater than label size can be customized
Complete machine size: about 1500mm × 1000mm × 1350mm
Power supply: 220V/50HZ
Complete machine weight: 150 Kg

全自动下平面贴标机

Fully automatic lower plane labeling machine



基本用途



BASIC USE

全自动下平面贴标机适用于各种产品下平面贴标，优点在于前面不需要进行翻转就可以轻松实现下平面贴标，可前后连接其它设备使用。广泛应用于食品，文具、日化行业。

可选配打码机或喷码机，可实现在标签上打印生产日期、批号、喷印条码等信息。可选配喷码机到输送带，可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。

工作原理：产品一个个放在输送上，输送到贴标位置进行下平面贴标

The fully automatic lower plane labeling machine is suitable for lower plane labeling of various products. The advantage is that the lower plane labeling can be easily realized without turning the front, and it can be connected to other equipment front and back for use. Widely used in food, stationery and daily chemical industries.

Optional coding machine or inkjet printer, which can print the production date, batch number, inkjet barcode and other information on the label. Optional inkjet printer to conveyor belt, which can print the production date, batch number, bar code and other information on the product before or after labeling.

Working principle: The products are placed on the conveyor one by one and transported to the labeling position for lower plane labeling



设备参数



EQUIPMENT PARAMETERS

贴标精度：±2mm (不含产品、标签误差)

贴标速度：40-80个/分钟 (与产品、标签尺寸有关)

适用产品：根据客户提供样品尺寸定制

适应标签尺寸：长度6mm-250mm

宽度 (底纸宽度) 6mm-150mm 大于标签尺寸可定做

整机尺寸：约1700mm × 1000mm × 1350mm

整机电源：220V/50HZ

整机重量：150Kg

Labeling accuracy: ± 2 mm (excluding product and label error)

Labeling speed: 40-80 pcs/min (related to product, label size)

Applicable products: Customized according to the sample size provided by customers

Adaptable label size: length 6mm-250mm

Width (backing paper width) 6mm-150mm greater than label size can be customized

Complete machine size: about 1700mm × 1000mm × 1350mm

Power supply: 220V/50HZ

Complete machine weight: 150 Kg



全自动纸箱贴标机

Fully automatic automatic lifting plane labeling machine

基本用途



BASIC USE

全自动纸箱贴标机适用于在各种未成形纸箱的上平面贴标签或不干胶膜，如纸箱、纸盒、文件夹、大尺寸纸卡等，更换覆标机构可适用于不平整表面贴标，广泛应用于各类平面类产品的平面贴标。

工作原理：将一叠产品放在分卡机上，分卡机一张张分出输送到贴标位置进行贴标，收料盘进行收料。

The fully automatic automatic lifting flat labeling machine is suitable for labeling various bags, cartons, silicone sheets, and protective films. It is suitable for lighter products and can discharge more materials at one time than materials.

Working principle: Place multiple products on the lifting platform, the lifting platform lifts and lowers according to the product conditions, sucks the products on the conveyor, conveys them to the labeling position for labeling, and collects the materials on the receiving tray.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)

贴标速度：30-60个/分钟 (与产品、标签尺寸有关)

适用产品：根据客户提供样品尺寸定制

适应标签尺寸：长度6mm-250mm

宽度 (底纸宽度) 6mm-150mm 不在尺寸范围内，可定做

整机尺寸：约3000mm × 1000mm × 1350mm

整机电源：220V/50HZ

整机重量：230Kg

备注：可在机器上增加打码机、喷码机、打印机

Labeling accuracy: ± 1 mm (excluding product and label error)

Labeling speed: 30-60 pcs/min (related to product, label size)

Applicable products: Customized according to the sample size provided by customers

Adaptable label size: length 6mm-250mm

Width (backing paper width) 6mm-150mm is not within the size range, can be customized

Power supply: 220V/50HZ

Complete machine weight: 230 Kg



全自动自动升降平面贴标机

Fully automatic automatic lifting plane labeling machine



基本用途



BASIC USE

全自动自动升降平面贴标机适用于在各种袋子、纸盒、硅胶片、保护膜贴标，适合比较轻的产品，一次性放料比料多。

工作原理：将多个产品放在升降平台上，升降平台根据产品情况进行升降，将产品吸到输送上，输送到贴标位置进行贴标，收料盘进行收料。

The fully automatic lower plane labeling machine is suitable for lower plane labeling of various products. The advantage is that the lower plane labeling can be easily realized without turning the front, and it can be connected to other equipment front and back for use. Widely used in food, stationery and daily chemical industries.

Optional coding machine or inkjet printer, which can print the production date, batch number, inkjet barcode and other information on the label. Optional inkjet printer to conveyor belt, which can print the production date, batch number, bar code and other information on the product before or after labeling.

Working principle: The products are placed on the conveyor one by one and transported to the labeling position for lower plane labeling



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：30-60个/分钟 (与产品、标签尺寸有关)
适用产品：根据客户提供样品尺寸定制
适应标签尺寸：长度6mm-250mm
宽度 (底纸宽度) 6mm-150mm
不在尺寸范围内，可定制
整机电源：220V/50HZ
整机重量：230Kg

Labeling accuracy: ± 2 mm (excluding product and label error)
Labeling speed: 40-80 pcs/min (related to product, label size)
Applicable products: Customized according to the sample size provided by customers
Adaptable label size: length 6mm-250mm
Width (backing paper width) 6mm-150mm greater than label size can be customized
Complete machine size: about 1700mm x 1000mm x 1350mm
Power supply: 220V/50HZ
Complete machine weight: 150 Kg



基本用途



BASIC USE

此款设备可贴圆瓶，方瓶，扁瓶，六角瓶，三角瓶，可贴一面，也可贴多面。滚贴方式可以避免贴标气泡。主要用于化妆品、食品和日用品行业贴标，如洗发水瓶、红酒瓶、药瓶、食品瓶等，可配色带打码机，打印生产日期，生产批号等信息，减少工序，提高生产效率。

工作原理：产品放在夹具上，用滚贴方式进行贴标。

This equipment can be attached to round bottles, square bottles, flat bottles, hexagonal bottles and triangular bottles. It can be attached to one side or multiple sides. The rolling method can avoid labeling bubbles. It is mainly used for labeling in cosmetics, food and daily necessities industries, such as shampoo bottles, red wine bottles, medicine bottles, food bottles, etc. It can be matched with a ribbon coding machine to print production date, production batch number and other information to reduce working procedures and improve production efficiency.

Working principle: The product is placed on the fixture and labeled by rolling.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.5mm (不含产品、标签误差)
贴标速度：15-25个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长度：20mm-150mm
宽度：20mm-150mm
高度：0.2mm-300mm
适应标签尺寸：长度15mm-100mm
宽度 (底纸宽度) 15mm-170mm 大于标签尺寸可定制
整机尺寸：约850mm x 410mm x 720mm
整机电源：220V/50HZ
整机重量：59Kg

Labeling accuracy: ± 0.5 mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product size: Length: 20 mm-150 mm
Width: 20 mm-150 mm
Height: 0.2 mm-300 mm
Adaptable label size: length 15mm-100mm
Width (backing paper width) 15mm-170mm larger than label size can be customized
Complete machine size: about 850mm x 410mm x 720mm
Power supply: 220V/50HZ
Complete machine weight: 59 Kg



半自动双侧面贴标机

Semi-automatic double-side labeling machine



基本用途

BASIC USE

适用于扁瓶、圆瓶、方瓶的单侧面和双侧面贴标，如洗发水扁瓶，润滑油扁瓶，机油瓶等双侧面贴标，两面同时贴标提高生产效率。

可选配打码机、喷码机，可实现在标签上打印生产日期、批号、喷印条码等信息。减少工序，提高生产效率。

工作原理：产品一个个放在输送上，输送到贴标位置两侧同时进行贴标。

It is suitable for single-side and double-side labeling of flat bottles, round bottles and square bottles, such as shampoo flat bottles, lubricating oil flat bottles, oil bottles and other double-side labeling. Labeling both sides at the same time improves production efficiency.

Optional coding machine and inkjet printer can print production date, batch number, inkjet bar code and other information on the label. Reduce working procedures and improve production efficiency.

Working principle: The products are placed on the conveyor one by one, and they are transported to both sides of the labeling position for labeling at the same time.



设备参数

EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：25-60个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长度：30mm-300mm
宽度：30mm-100mm
高度：50mm-320mm
适应标签尺寸：长度6mm-300mm
宽度 (底纸宽度) 6mm-230mm 大于标签尺寸可定做
整机尺寸：约1600mm×780mm×1400mm
整机电源：220V/50HZ
整机重量：180Kg

Labeling accuracy: ± 1 mm (excluding product and label error)
Labeling speed: 25-60 pcs/min (related to product, label size)
Applicable product size: Length: 30 mm-300 mm
Width: 30 mm-100 mm
Height: 50 mm-320 mm
Adaptable label size: length 6mm-300mm
Width (backing paper width) 6mm-230mm greater than label size can be customized
Complete machine size: about 1600mm × 780mm × 1400mm
Power supply: 220V/50HZ
Complete machine weight: 180 Kg

基本用途


BASIC USE

此款设备可贴圆瓶，方瓶，六角瓶，三角瓶贴多面。主要用于电子行业、食品行业，可配色带打码机，打印生产日期，生产批号等信息，减少工序，提高生产效率。

工作原理：产品放在夹具上，用旋转滚贴方式进行贴标。

This equipment can stick round bottles, square bottles, hexagonal bottles and triangular bottles with multiple sides. It is mainly used in electronic industry and food industry. It can be matched with ribbon coding machine to print production date, production batch number and other information, reduce working procedures and improve production efficiency.

Working principle: The product is placed on the fixture and labeled by rotating and rolling.

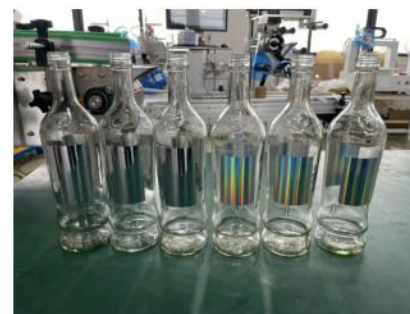

半自动旋转贴标机

Semi-automatic rotary labeling machine



设备参数

EQUIPMENT PARAMETERS

贴标精度：±0.5mm (不含产品、标签误差)
贴标速度：15-25个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长度：20mm-150mm
宽度：20mm-150mm
高度：0.2mm-300mm
适应标签尺寸：长度15mm-100mm
宽度 (底纸宽度) 15mm-170mm 大于标签尺寸可定做
整机尺寸：约850mm×410mm×720mm
整机电源：220V/50HZ
整机重量：59Kg。
备注：锥度瓶可定制

Labeling accuracy: ± 0.5 mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product size: Length: 20 mm-150 mm
Width: 20 mm-150 mm
Height: 0.2 mm-300 mm
Adaptable label size: length 15mm-100mm
Width (backing paper width) 15mm-170mm larger than label size can be customized
Complete machine size: about 850mm × 410mm × 720mm
Power supply: 220V/50HZ
Complete machine weight: 59 Kg.
Remarks: Taper bottle can be customized



侧面打印贴标机

Side printing and labeling machine



基本用途



BASIC USE

适用于各种侧面打印贴标，如装好产品的纸箱，大桶，各类型的侧面贴标，打印二维码，条形码，生产日期，产品规格等，打印机品牌型号可选择。

Suitable for all kinds of side printing and labeling, such as cartons and barrels containing products, various types of side labeling, printing QR codes, barcodes, production dates, product specifications, etc. Printer brands and models can be selected



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
 贴标速度：15-30个/分钟 (与产品、标签尺寸、打印机型号有关)
 适用产品：无需求 (取决于流水线输送参数)
 适应标签尺寸：长度20mm-150mm
 宽度 (底纸宽度) 20mm-104mm
 不在尺寸范围内，可以重新选型打印机
 整机尺寸：约1200mm × 1000mm × 1350mm
 整机电源：220V/50HZ
 整机重量：150Kg
 备注：机器可配套在客户输送上使用，也可以定制带输送一体机。

Labeling accuracy: ± 1 mm (excluding product and label error)
 Labeling speed: 15-30 pcs/min ((related to product, label size, printer model)
 Applicable products: No requirement (depending on assembly line conveying parameters)
 Adaptable label size: length 20mm-150mm
 Width (backing paper width) 20mm-104mm is not within the size range, you can re-select the printer
 Complete machine size: about 1200mm × 1000mm × 1350mm
 Power supply: 220V/50HZ
 Complete machine weight: 150 Kg
 Remarks: The machine can be used with customer conveying, or it can be customized with conveying all-in-one machine.



卷标贴标机

Roll label labeling machine



基本用途



BASIC USE

适用于标签在标签上贴标，或标签在膜上贴标

工作原理：标签放在放卷结构上，用收卷结构收料，贴标机在中间位置检测到贴标点进行贴标

Suitable for label-on-label label, or label-on-film label

Working principle: The label is placed on the unwinding structure, and the material is received by the winding structure. The labeling machine detects the labeling point in the middle position for labeling



设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.5mm (不含产品、标签误差)
 贴标速度：100-200个/分
 适用产品尺寸：卷膜外径300mm以下均可
 吸贴适应标签尺寸：长度6mm-100mm
 宽度 (底纸宽度) 6mm-100mm
 滚贴适应标签尺寸：长度6mm-150mm
 宽度 (底纸宽度) 6mm-150mm
 整机尺寸：(长 × 宽 × 高) 约1550mm × 720mm × 1350mm
 整机电源：220V/50HZ
 整机重量：160Kg

Labeling accuracy: ± 0.5 mm (excluding product and label error)
 Labeling speed: 100-200 pcs/min
 Applicable product size: Roll film outer diameter below 300mm is acceptable
 Suction sticker adaptable label size: length 6mm-100mm
 Width (backing paper width) 6mm-100mm
 Roll-on adaptable label size: length 6mm-150mm
 Width (backing paper width) 6mm-150mm
 Complete machine size: (length × width × height) about 1550mm × 720mm × 1350mm
 Power supply: 220V/50HZ
 Complete machine weight: 160 Kg



对折贴标机

Folding labeling machine



基本用途



BASIC USE

半自动对折贴标机（含显示屏）属于半自动贴标机，应用对折方式贴标，实现在各种管件、线材线缆、工艺品对折贴标，如电源线贴标、数据线贴标、棒棒糖贴标，果冻贴标、五金制品贴标等。更改治具，可适用于各种不同尺寸工件的贴标。

工作原理：产品放在夹具上，进行吸附对折贴标。

Semi-automatic folding labeling machine (including display screen) is a semi-automatic labeling machine. It uses the folding method for labeling to realize folding labeling on various pipe fittings, wires and cables, and handicrafts, such as power cord labeling, data cord labeling, Lollipop labeling, jelly labeling, hardware product labeling, etc. Change the fixture, which can be applied to labeling various workpieces of different sizes.

Working principle: The product is placed on the fixture, and it is adsorbed and folded in half for labeling.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.3mm (不含产品、标签误差)
贴标速度：15-25个/分钟（与产品、标签尺寸有关）
适用产品尺寸：直径：2.2mm-6.5mm；直径：6.5mm-10.5mm
适应标签尺寸：长度6mm-28mm
宽度（底纸宽度）20mm-170mm
大于标签尺寸可定做

整机尺寸：约910mm×800mm×1100mm
整机电源：220V/50HZ
适用气压：0.4~0.6Mpa
整机重量：80Kg

Labeling accuracy: ± 0.3mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product size: Diameter: 2.2 mm-6.5mm; Diameter: 6.5 mm-10.5 mm
Adaptable label size: length 6mm-28mm
Width (backing paper width) 20mm-170mm greater than label size can be customized
Complete machine size: about 910mm × 800mm × 1100mm
Power supply: 220V/50HZ
Applicable air pressure: 0.4 ~ 0.6 Mpa
Complete machine weight: 80 Kg



基本用途



BASIC USE

半自动打印对折贴标机（含显示屏和打印机）属于半自动打印贴标机，实现在各种管件、线材线缆、工艺品对折贴标，如电源线贴标、数据线贴标、棒棒糖贴标，果冻贴标、五金制品贴标等。更改治具，可适用于各种不同尺寸工件的贴标。采用打印贴标方式一体方式，提升工作效率。

工作原理：产品放在夹具上，进行打印吸附对折贴标。

Semi-automatic printing and folding labeling machine (including display screen and printer) is a semi-automatic printing and labeling machine, which realizes folding and labeling of various pipe fittings, wires and cables, and handicrafts, such as power cord labeling, data cord labeling, lollipop labeling, jelly labeling, hardware product labeling, etc. Change the fixture, which can be applied to labeling various workpieces of different sizes. Adopt an integrated printing and labeling method to improve work efficiency.

Working principle: The product is placed on the fixture, printed, adsorbed, folded in half and labeled.



打印对折贴标机

Printing folding labeling machine



设备参数



EQUIPMENT PARAMETERS


贴标精度：±0.3mm (不含产品、标签误差)
贴标速度：15-25个/分钟（与产品、标签尺寸有关）
适用产品尺寸：1-3mm；2-5mm；3-7mm；4-10mm 标配一组
适应标签尺寸：长30-100mm宽20-100mm
大于标签尺寸可定做

整机尺寸：约910mm×800mm×1100mm
整机电源：220V/50HZ
适用气压：0.4~0.6Mpa
整机重量：80Kg

Labeling accuracy: ± 0.3mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product size: 1-3 mm; 2-5 mm; 3-7 mm; 4-10mm comes standard with a set
Adaptable label size: length 30-100mm width 20-100mm larger than label size can be customized
Complete machine size: about 910mm × 800mm × 1100mm
Power supply: 220V/50HZ
Applicable air pressure: 0.4 ~ 0.6 Mpa
Complete machine weight: 80 Kg



流水线贴标头 Pipeline labeling head

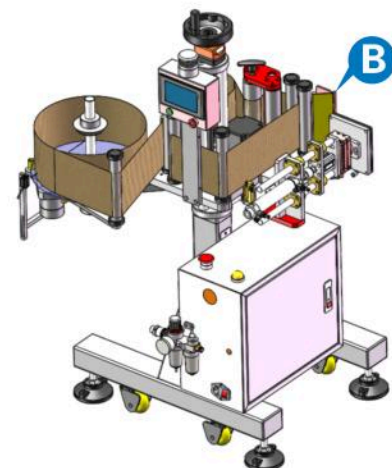

- A 龙门架平面标头
- B 侧面吸贴标头
- C 侧面滚贴标头
- D 平面滚贴标头
- E 平面吸贴标头

基本用途



BASIC USE

根据客户需求，配套在客户的输送线上进行平面或侧面的贴标，滚贴适合平整的产品，吸贴适合有凹的产品。

工作原理：配套在客户输送线旁边，输送到贴标位置进行平面或侧面贴标

According to the customers needs, flat or side labeling is carried out on the customers conveyor line. Rolling sticking is suitable for flat products, and suction sticking is suitable for concave products.

Working principle: It is matched next to the customers conveyor line and transported to the labeling position for plane or side labeling

设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)

贴标速度：1-120个/分

适用产品尺寸：取决于客户输送的宽度

吸贴适应标签尺寸：长度6mm-100mm

宽度（底纸宽度）6mm-100mm

滚贴适应标签尺寸：长度6mm-250mm

宽度（底纸宽度）6mm-150mm

整机尺寸：约1000mm×800mm×1350mm

整机电源：220V/50HZ

整机重量：80Kg

Labeling accuracy: ± 1 mm (excluding product and label error)

Labeling speed: 1-120 pcs/min

Applicable product size: depends on the width conveyed by the customer

Suction sticker adaptable label size: length 6mm-100mm

Width (backing paper width) 6mm-100mm

Roll-on adaptable label size: length 6mm-250mm


Width (backing paper width) 6mm-150mm

Complete machine size: about 1000mm × 800mm × 1350mm

Power supply: 220V/50HZ

Complete machine weight: 80 Kg

爬坡高速贴标机 Climbing high-speed labeling machine

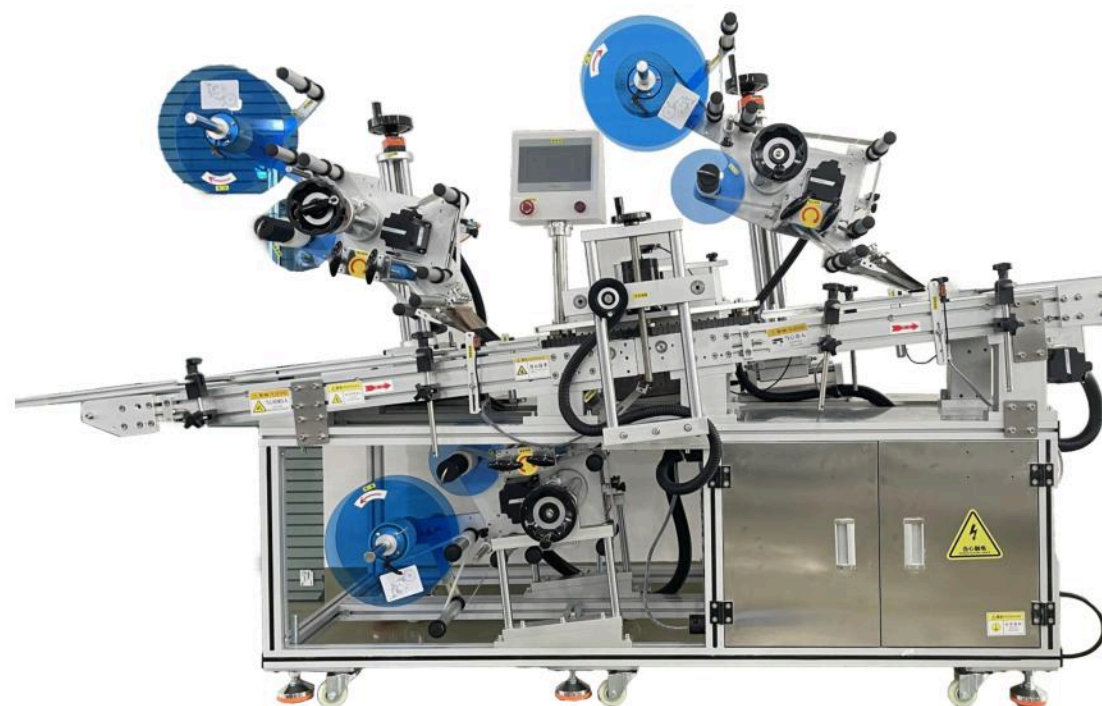

基本用途



BASIC USE

机器为定制款，上下平面同时贴标。可选配喷码机到输送带，可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。减少工序，提高生产效率。

The machine is customized, and the upper and lower planes are labeled at the same time. Optional inkjet printer to conveyor belt, which can print the production date, batch number, bar code and other information on the product before or after labeling. Reduce working procedures and improve production efficiency.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±2mm (不含产品、标签误差)

贴标速度：120-200个/分钟（与产品、标签尺寸有关）

适用产品尺寸：长：10mm-400mm 宽：10mm-300mm

高：0.2mm-150mm

适应标签尺寸：长度6mm-250mm

宽度（底纸宽度）6mm-150mm 大于标签尺寸可定做

整机尺寸：约2800mm×1000mm×1500mm

整机电源：220V/50HZ

整机重量：300Kg

备注：支持客户任意尺寸定制

Labeling accuracy: ± 2 mm (excluding product and label error)

Labeling speed: 120-200 pcs/min (related to product, label size)

Applicable product size: length: 10mm ~ 400mm width: 10mm ~ 300mm

height: 0.2 mm ~ 150mm

Adaptable label size: length 6mm-250mm

Width (backing paper width) 6mm-150mm greater than label size can be customized

Complete machine size: about 2800mm × 1000mm × 1500mm

Power supply: 220V/50HZ


Complete machine weight: 300 Kg

Remarks: Support customers to customize any size



全自动侧面贴标机

Fully automatic flat labeling machine

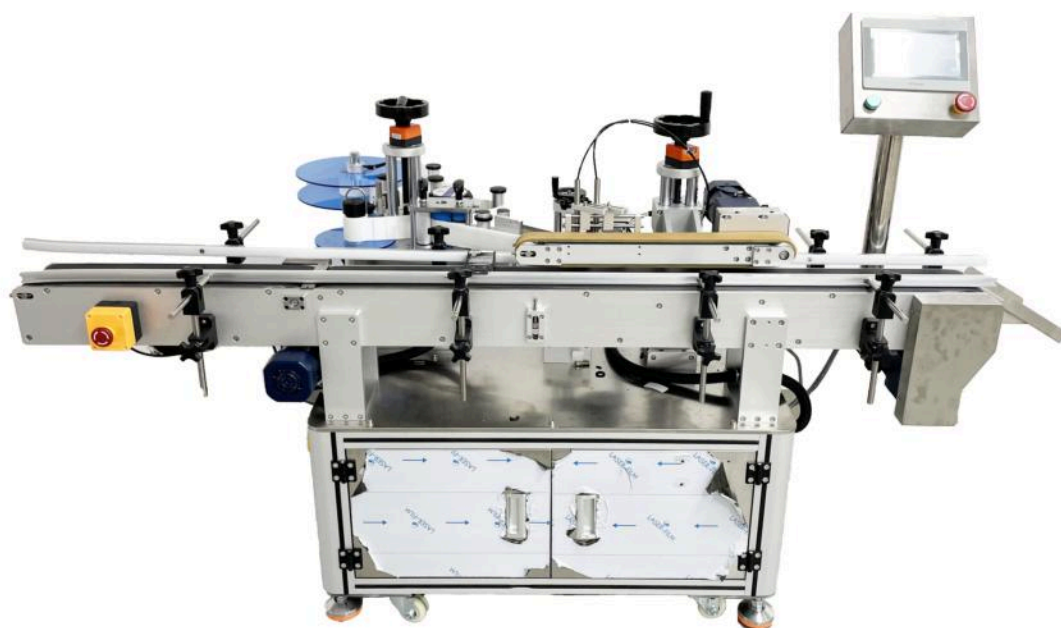

基本用途



BASIC USE

全自动侧面贴标机分简易款和标准款两种，适用于各种物品的侧面贴标，被贴物较重可省掉动力压顶功能。可选配打码机或喷码机，可实现在标签上打印生产日期、批号、喷印条码等信息。可选配喷码机到输送带，可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。减少工序，提高生产效率。

工作原理：产品一个个放在输送上，输送到贴标位置进行侧面贴标

The fully automatic side labeling machine is divided into two types: simple model and standard model. It is suitable for side labeling of various items. If the objects to be labeled are heavy, the power pressing function can be omitted. Optional coding machine or inkjet printer, which can print the production date, batch number, inkjet barcode and other information on the label. Optional inkjet printer to conveyor belt, which can print the production date, batch number, bar code and other information on the product before or after labeling. Reduce working procedures and improve production efficiency.

Working principle: The products are placed on the conveyor one by one and transported to the labeling position for side labeling



设备参数




EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：40-120个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长：10mm~400mm 宽：10mm~300mm 高：0.2mm~150mm
适应标签尺寸：长度6mm-250mm
宽度 (底纸宽度) 6mm-150mm 大于标签尺寸

可定做
整机尺寸：约1500mm×1000mm×1350mm
整机电源：220V/50HZ
整机重量：150Kg

Labeling accuracy: ± 1 mm (excluding product and label error)
Labeling speed: 40-120 pcs/min (related to product, label size)
Applicable product size: length: 10mm ~ 400mm width: 10mm ~ 300mm height: 0.2 mm ~ 150mm
Adaptable label size: length 6mm-250mm
Width (backing paper width) 6mm-150mm greater than label size can be customized
Complete machine size: about 1500mm × 1000mm × 1350mm
Power supply: 220V/50HZ
Complete machine weight: 150 Kg

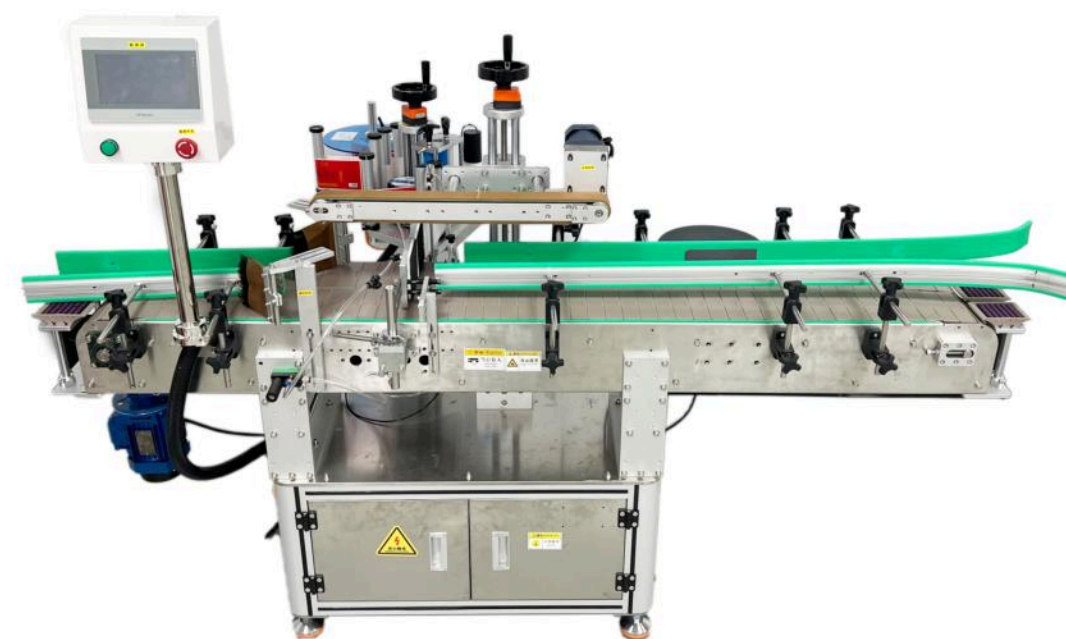

全自动三面贴标机

Fully automatic three-sided labeling machine

基本用途



BASIC USE

全自动三面贴标机，适合方形产品三面贴标，可选配打码机、喷码机或打印机，可实现在标签上打印生产日期、批号、喷印条码等信息。可选配喷码机到输送带，可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。

工作原理：产品一个个放在输送上，或者从其它设备流到贴标机，输送到贴标位置进行三面贴标

Fully automatic three-sided labeling machine, suitable for three-sided labeling of square products. It can be equipped with a coding machine, inkjet printer or printer, which can print production date, batch number, inkjet barcode and other information on the label. Optional inkjet printer to conveyor belt, which can print the production date, batch number, bar code and other information on the product before or after labeling.

Working principle: The products are placed on the conveyor one by one, or flow from other equipment to the labeling machine, and transported to the labeling position for three-sided labeling



设备参数



EQUIPMENT PARAMETERS


贴标精度：±1mm (下平面精度±2mm，不含产品、标签误差)
贴标速度：30-60个/分钟 (与产品、标签尺寸有关)
适用产品：根据客户提供样品尺寸定制
适应标签尺寸：长度6mm-250mm
宽度 (底纸宽度) 6mm-150mm 大于标签尺寸可定做
整机尺寸：约2000mm×1000mm×1350mm
整机电源：220V/50HZ
功率：1.7KW
整机重量：230Kg

Labeling accuracy: ± 1 mm (lower plane accuracy ± 2 mm, excluding product and label errors)
Labeling speed: 30-60 pcs/min (related to product, label size)
Applicable products: Customized according to the sample size provided by customers
Adaptable label size: length 6mm-250mm
Width (backing paper width) 6mm-150mm greater than label size can be customized
Complete machine size: about 2000mm × 1000mm × 1350mm
Power supply: 220V/50HZ
Power: 1.7 KW
Complete machine weight: 230 Kg



全自动上下平面贴标机

Fully automatic upper and lower plane labeling machine

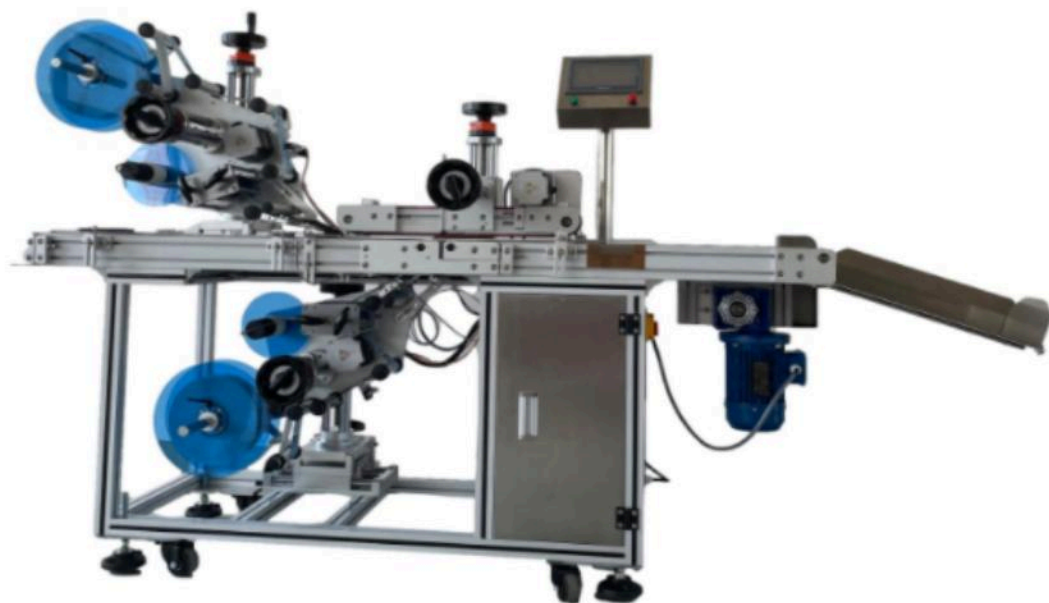

基本用途



BASIC USE

全自动上下平面贴标机适用于各种纸盒，塑胶类盒子，如牙线棒盒子。广泛应用于食品，文具、日化行业。可选配打码机、喷码机或打印机，可实现在标签上打印生产日期、批号、喷印条码等信息。可选配喷码机到输送带，可实现贴标前或贴标后在产品上喷印生产日期、批号、条码等信息。

工作原理：产品一个个放在输送上，输送到贴标位置上下同时进行贴标，不同的产品用不同的覆标结构进行覆标，再下料。

Fully automatic upper and lower plane labeling machine is suitable for all kinds of cartons and plastic boxes, such as dental floss stick boxes. Widely used in food, stationery and daily chemical industries.

Optional coding machine, inkjet printer or printer, which can print production date, batch number, inkjet barcode and other information on the label. Optional inkjet printer to conveyor belt, which can print the production date, batch number, bar code and other information on the product before or after labeling.

Working principle: The products are placed on the conveyor one by one, transported to the labeling position and labeled at the same time. Different products are labeled with different labeling structures, and then blanked.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (下平面精度±2mm，不含产品、标签误差)
贴标速度：30-60个/分钟 (与产品、标签尺寸有关)
适用产品：根据客户提供样品尺寸定制
适应标签尺寸：长度6mm-250mm
宽度 (底纸宽度) 6mm-150mm
大于标签尺寸可定做

整机尺寸：约2000mm×1000mm×1350mm

整机电源：220V/50HZ

整机重量：230Kg

Labeling accuracy: ± 1 mm (lower plane accuracy ± 2 mm, excluding product and label errors)

Labeling speed: 30-60 pcs/min (related to product, label size)

Applicable products: Customized according to the sample size provided by customers


Adaptable label size: length 6mm-250mm

Width (backing paper width) 6mm-150mm greater than label size can be customized

Complete machine size: about 2000mm × 1000mm × 1350mm

Power supply: 220V/50HZ

Complete machine weight: 230 Kg

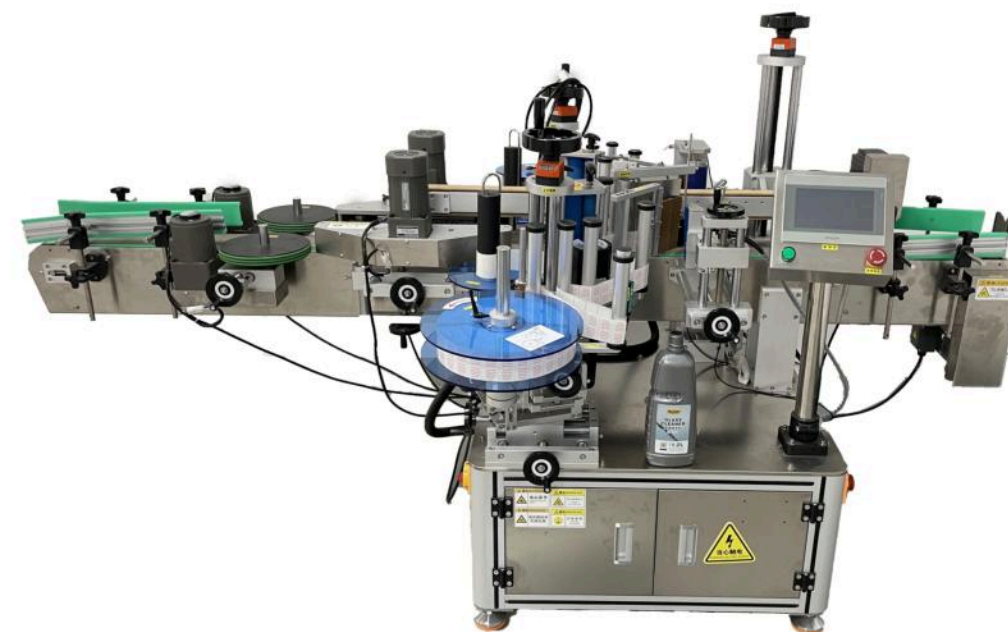

全自动双侧侧面贴标机

Fully automatic double-side labeling machine

基本用途



BASIC USE

适用于扁瓶、圆瓶、方瓶的单侧面和双侧面贴标，如洗发水扁瓶，润滑油扁瓶，机油瓶等双侧面贴标，两面同时贴标提高生产效率。可选配圆瓶贴标机构，实现圆瓶半周/全周贴标。

可选配打码机、喷码机，可实现在标签上打印生产日期、批号、喷印条码等信息。

工作原理：产品一个个放在输送上，输送到贴标位置两侧同时进行贴标。

It is suitable for single-side and double-side labeling of flat bottles, round bottles and square bottles, such as shampoo flat bottles, lubricating oil flat bottles, oil bottles and other double-side labeling. Labeling both sides at the same time improves production efficiency. Optional round bottle labeling mechanism to achieve half-cycle/full-cycle labeling of round bottles.

Optional coding machine and inkjet printer can print production date, batch number, inkjet bar code and other information on the label.

Working principle: The products are placed on the conveyor one by one, and they are transported to both sides of the labeling position for labeling at the same time.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±2mm (下平面精度±2mm，不含产品、标签误差)
贴标速度：60-150个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长度：20mm-250mm
宽度：30mm-90mm
高度：60mm-280mm
适应标签尺寸：长度6mm-200mm
宽度 (底纸宽度) 6mm-160mm 大于标签尺寸可定做

整机尺寸：约2500mm×1450mm×1600mm

整机电源：220V/50HZ

整机重量：280Kg

Labeling accuracy: ± 2 mm (lower plane accuracy ± 2 mm, excluding product and label errors)

Labeling speed: 60-150 pcs/min (related to product, label size)

Applicable product dimensions: Length: 20 mm-250 mm

Width: 30 mm-90 mm

Height: 60 mm-280 mm

Adaptable label size: length 6mm-200mm

Width (backing paper width) 6mm-160mm greater than label size can be customized

Complete machine size: about 2500mm × 1450mm × 1600mm

Power supply: 220V/50HZ

Complete machine weight: 280 Kg



全自动转角贴标机

Fully automatic corner labeling machine



基本用途



BASIC USE

全自动转角贴标机适用于各种产品的封口贴标，可根据要求实现一个封口贴标，两个封口贴标，三个封口或四个封口贴，机器可选择简易款和标准款。可以同时贴两个上平面封口，也可以贴一上一下两个封口，也可以贴两个下平面封口。可单机使用，也可以连接装盒机使用。广泛应用电子、玩具行业。

工作原理：产品一个个放在输送上或从装盒机输送过来，输送到贴标位置进行90度转角贴标，根据不同的标签硬度，选择不同的材质对标签进行覆标。

Fully automatic corner labeling machine is suitable for sealing and labeling of various products. It can realize one sealing and labeling, two sealing and labeling, three sealing or four sealing stickers according to the requirements. The machine can choose simple and standard models. You can attach two upper plane seals at the same time, or you can attach one upper and two lower plane seals, or you can attach two lower plane seals. It can be used as a stand-alone machine or connected to a cartoning machine. Widely used in electronic and toy industries.

Working principle: The products are placed on the conveyor one by one or transported from the cartoning machine, and transported to the labeling position for 90-degree corner labeling. According to different label hardness, different materials are selected to cover the label.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：40-80个/分钟（与产品、标签尺寸有关）
适用产品：根据客户提供样品尺寸定制
适应标签尺寸：长度6mm-50mm
宽度（底纸宽度）6mm-50mm
整机尺寸：约1700mm×1000mm×1350mm
整机电源：220V/50HZ
整机重量：150Kg
备注：此类设备属于定制类

Labeling accuracy: ± 1 mm (excluding product and label error)
Labeling speed: 40-80 pcs/min (related to product, label size)
Applicable products: Customized according to the sample size provided by customers
Adaptable label size: length 6mm-50mm
Width (backing paper width) 6mm-50mm
Complete machine size: about 1700mm × 1000mm × 1350mm
Power supply: 220V/50HZ
Complete machine weight: 150 Kg
Remarks: This type of equipment belongs to the custom class



实时打印吹贴标机

Real-time printing, blowing and labeling machine



基本用途



BASIC USE

适用于各种不平整产品上的打印贴标，如服装，冷冻产品，蔬果，各类型的吹贴贴标，打印二维码，条形码，生产日期，产品规格等，打印机品牌型号可选择

工作原理：把产品放在输送上，输送到贴标处，打印机接收打印信息，用吹气的方式，把标签贴在被贴物上，根据不同产品的特性，选择不同的覆标结构进行覆标，再下料。

Suitable for printing and labeling on various uneven products, such as clothing, frozen products, fruits and vegetables, various types of blow labeling, printing QR codes, barcodes, production dates, product specifications, etc. Printer brands and models can be selected

Working principle: Put the product on the conveyor and transport it to the labeling place. The printer receives the printing information and pastes the label on the labeled object by blowing air. According to the characteristics of different products, different labeling structures are selected for labeling. Label and then blank.

设备参数



EQUIPMENT PARAMETERS

贴标精度：±3mm (不含产品、标签误差)
贴标速度：10-15个/分钟（与产品、标签尺寸、打印机型号有关）
适用产品：无需求（取决于流水线输送参数）
适应标签尺寸：长度20mm-150mm
宽度（底纸宽度）20mm-104mm
不在尺寸范围内，可以重新选型打印机
整机尺寸：约1200mm×1000mm×1350mm
整机电源：220V/50HZ
整机重量：160Kg
备注：机器可配套在客户输送上使用，也可以定制带输送一体机。

Labeling accuracy: ± 3 mm (excluding product and label error)
Labeling speed: 10-15 pcs/min ((related to product, label size, printer model)
Applicable products: No requirement (depending on assembly line conveying parameters)
Adaptable label size: length 20mm-150mm
Width (backing paper width) 20mm-104mm is not within the size range, you can re-select the printer
Complete machine size: about 1200mm × 1000mm × 1350mm
Power supply: 220V/50HZ
Complete machine weight: 160 Kg
Remarks: The machine can be used with customer conveying, or it can be customized with conveying all-in-one machine.

视觉贴标机

Visual labeling machine



基本用途



BASIC USE

视觉贴标机是一款精准定位贴标机，贴标精度高，解决各种精密辅料贴标难问题，广泛应用于电子行业，如充电器，PCB板，异形产品等。可多头使用，也可以加打印功能。

工作原理：产品上料→视觉停标贴合位→飞达上标→XYZR轴模组取标→上相机拍照定位→下相机拍照定位→产品贴标

The visual labeling machine is a precise positioning labeling machine with high labeling accuracy and solves the difficult labeling problem of various precision auxiliary materials. It is widely used in the electronic industry, such as chargers, PCB boards, special-shaped products, etc. It can be used with multiple heads, and the printing function can also be added.

Working principle: product loading → visual stop labeling and fitting position → Feida superscript → XYZR axis module labeling → upper camera photo positioning → lower camera photo positioning → product labeling



设备参数



EQUIPMENT PARAMETERS

贴标精度：±0.05mm (不含产品、标签误差)
贴标速度：15-25个/分钟 (与产品、标签尺寸有关)
适用产品尺寸：长：10mm~200mm宽：10mm~200mm
高：0.2mm~150mm
适应标签尺寸：长度6mm~90mm
宽度 (底纸宽度) 6mm~100mm
大于标签尺寸可定做

整机尺寸：约1500mm×1000mm×1350mm
整机电源：220V/50HZ
整机重量：180Kg

Labeling accuracy: ± 0.05 mm (excluding product and label error)
Labeling speed: 15-25 pcs/min (related to product, label size)
Applicable product size: length: 10mm ~ 200mm width: 10mm ~ 200mm
height: 0.2 mm ~ 150mm
Adaptable label size: length 6mm~90mm
Width (backing paper width) 6mm~100mm greater than label size can be customized
Complete machine size: about 1500mm × 1000mm × 1350mm
Power supply: 220V/50HZ
Complete machine weight: 180 Kg



分卡式缓存打印贴标机

Sub-card cache printing and labeling machine

基本用途




BASIC USE

适用于各种卡片和袋子、盒子的上平面贴标签，如刮刮卡、电影票、纸卡、纸盒、PE袋，广泛应用于印刷、文具、食品、日化、医药等行业。打印二维码，条形码，生产日期，产品规格等，打印机品牌型号可选择

工作原理：将一叠产品放在分卡机上，分卡机一张张分出输送到贴标位置，打印机接受信息进行打印贴标，收料盘进行收料。

It is suitable for labeling the upper plane of various cards and bags, boxes, such as scratch cards, movie tickets, paper cards, paper boxes, PE bags, which are widely used in printing, stationery, food, daily chemical, medicine and other industries. Print QR code, bar code, production date, product specifications, etc. Printer brand and model can be selected

Working principle: Put a stack of products on the card splitting machine, and the card splitting machine separates them out one by one and transports them to the labeling position. The printer accepts the information for printing and labeling, and the material receiving tray receives the materials.

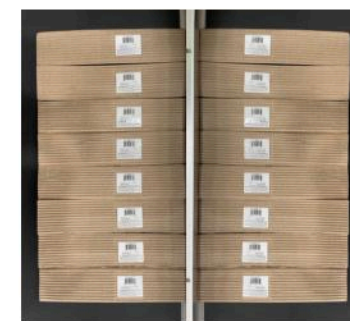

设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：30-60个/分钟 (与产品、标签尺寸、打印机型号有关)
适用产品：无需求 (取决于流水线输送参数)
适应标签尺寸：长度20mm~150mm
宽度 (底纸宽度) 20mm~104mm
不在尺寸范围内，可以重新选型打印机

整机尺寸：约2200mm×1000mm×1350mm
整机电源：220V/50HZ
整机重量：200Kg
备注：机器可配套在客户输送上使用，也可以定制带输送一体机。

Labeling accuracy: ± 1 mm (excluding product and label error)
Labeling speed: 30-60 pcs/min ((related to product, label size, printer model)
Applicable products: No requirement (depending on assembly line conveying parameters)
Adaptable label size: length 20mm~150mm
Width (backing paper width) 20mm~104mm is not within the size range, you can re-select the printer
Complete machine size: about 2200mm × 1000mm × 1350mm
Power supply: 220V/50HZ
Complete machine weight: 200 Kg
Remarks: The machine can be used with customer conveying, or it can be customized with conveying all-in-one machine.

全自动分卡式贴标机

Automatic Card Dispensing Labeling Machine



基本用途



BASIC USE

全自动分卡式贴标机，一般用于袋子、彩盒、吊牌类的贴标，广泛应用于各类平面类产品的平面贴标。

工作原理：将一叠产品放在分卡机上，分卡机一张张分出输送到贴标位置进行贴标，收料盘进行收料。

The automatic card dispensing labeling machine is generally used for labeling bags, color boxes, and hang tags, widely applied to flat surface products for flat surface labeling.

Working Principle: Place a stack of products on the card dispenser, which separates them one by one and transports them to the labeling position for labeling, with a receiving tray for collecting the labeled products.



设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：40-120个/分钟 (与产品、标签尺寸有关)
适用产品：长40mm-300mm;宽40mm-300mm
适应标签尺寸：长度6mm-250mm

宽度 (底纸宽度) 6mm-150mm
不在尺寸范围内，可定做

整机尺寸：约2200mm×800mm×1350mm

整机电源：220V/50HZ

整机重量：180Kg

备注：可在机器上增加打码机、喷码机、打印机

Labeling Accuracy: ±1mm (excluding product and label errors)
Labeling Speed: 40-120 pieces/minute (related to product and label size)

Suitable Products: Length 40mm-300mm; Width 40mm-300mm

Suitable Label Sizes: Length 6mm-250mm

Width (backing width) 6mm-150mm; Customization available for sizes out of range

Overall Dimensions: Approximately 2200mm×800mm×1350mm


Power Supply: 220V/50HZ

Machine Weight: 180Kg

Note: A coding machine, inkjet printer, or thermal printer can be added to the machine.

全自动吸附式分页贴标机

Automatic Suction Type Page Labeling Machine

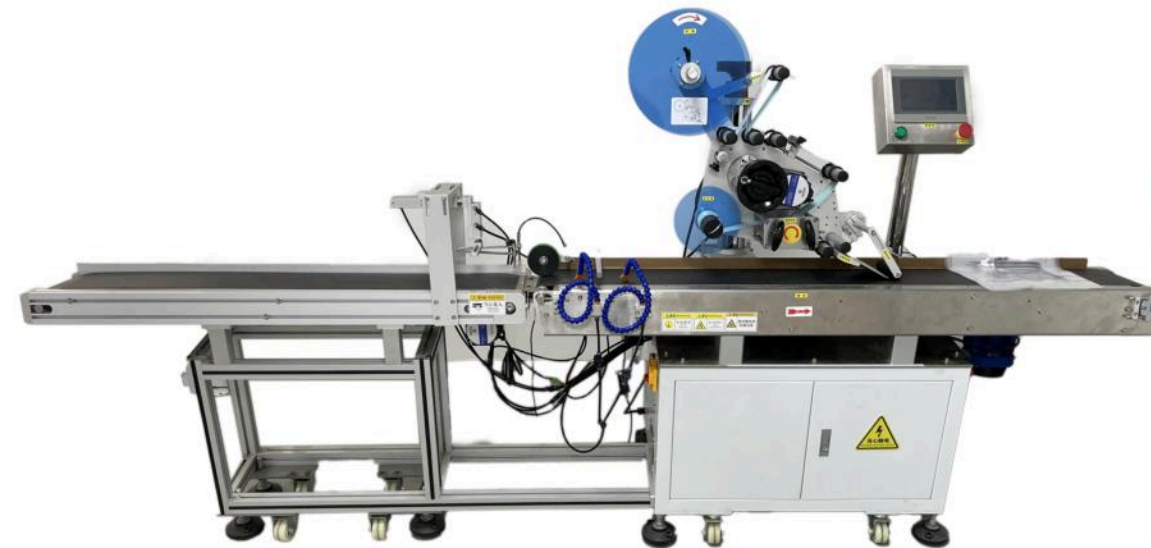

基本用途




BASIC USE

全自动吸附式分页贴标机，一般用于比较软点的袋子、异形类的产品分页贴标，广泛应用于各类平面类产品的平面贴标。

工作原理：将一叠产品放在分页输送上，通过吸气的方方式一张张吸分到贴标输送线上，到贴标位置进行贴标，收料盘进行收料。

The automatic suction type page labeling machine is generally used for labeling softer bags and irregular-shaped products, widely applied to flat surface labeling of various flat products.

Working Principle: Place a stack of products on the page feeding conveyor, separate them one by one through suction onto the labeling conveyor line, and label them at the labeling position, with the receiving tray collecting the labeled products.

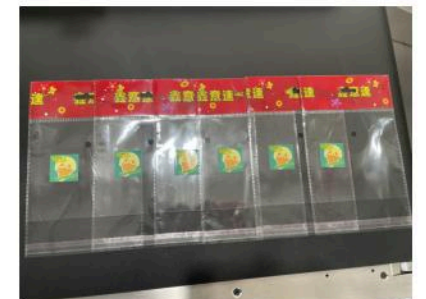

设备参数



EQUIPMENT PARAMETERS

贴标精度：±1mm (不含产品、标签误差)
贴标速度：30-50个/分钟 (与产品、标签尺寸有关)
适用产品：长60mm-400mm;宽40mm-400mm
适应标签尺寸：长度6mm-250mm

宽度 (底纸宽度) 6mm-150mm
不在尺寸范围内，可定做

整机尺寸：约2800mm×800mm×1350mm

整机电源：220V/50HZ

整机重量：180Kg

备注：可在机器上增加打码机、喷码机、打印机

Labeling Accuracy: ±1mm (excluding product and label errors)
Labeling Speed: 30-50 pieces/minute (related to product and label size)

Suitable Products: Length 60mm-400mm; Width 40mm-400mm

Suitable Label Sizes: Length 6mm-250mm

Width (backing width) 6mm-150mm; If not within these sizes, customization is available

Overall Dimensions: Approximately 2800mm×800mm×1350mm

Power Supply: 220V/50HZ

Machine Weight: 180Kg

Note: A coding machine, inkjet printer, or thermal printer can be added to the machine.

分卡式双标头贴标机



金属包边机




非标定制机型简介

Introduction to non-standard customized models


PART.
05



龙门架贴胶头

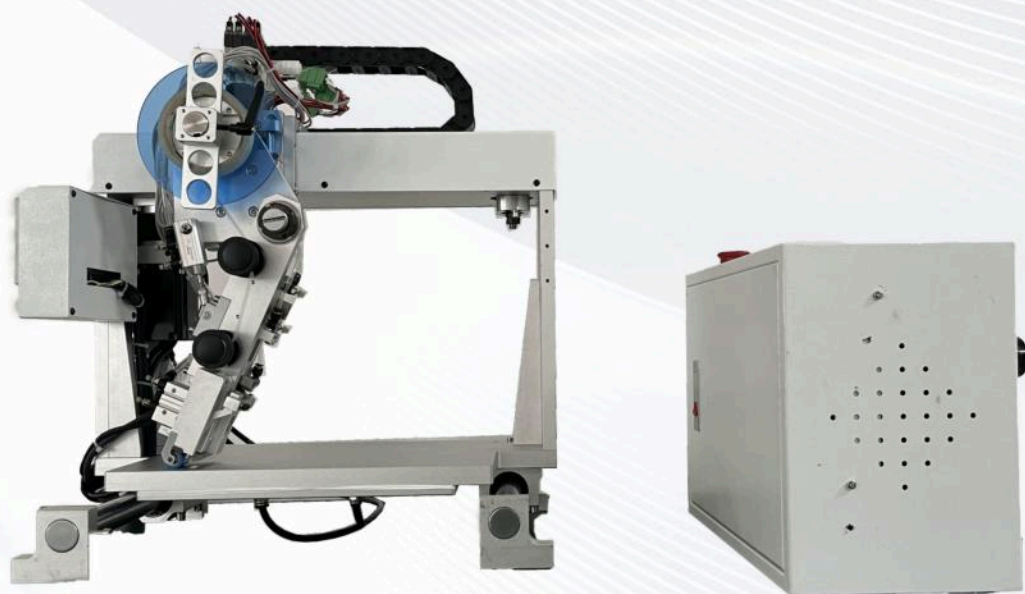

三标头平面贴标机

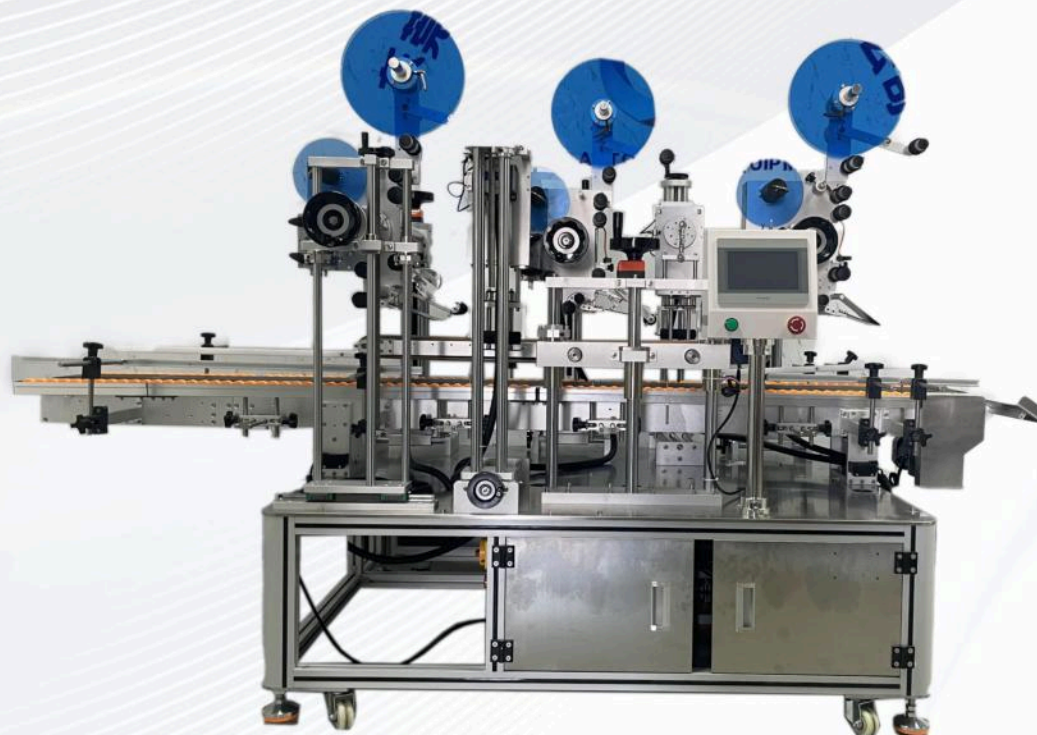


三标头定位圆瓶贴标机



三标头转角贴标机



双标头标签对折机

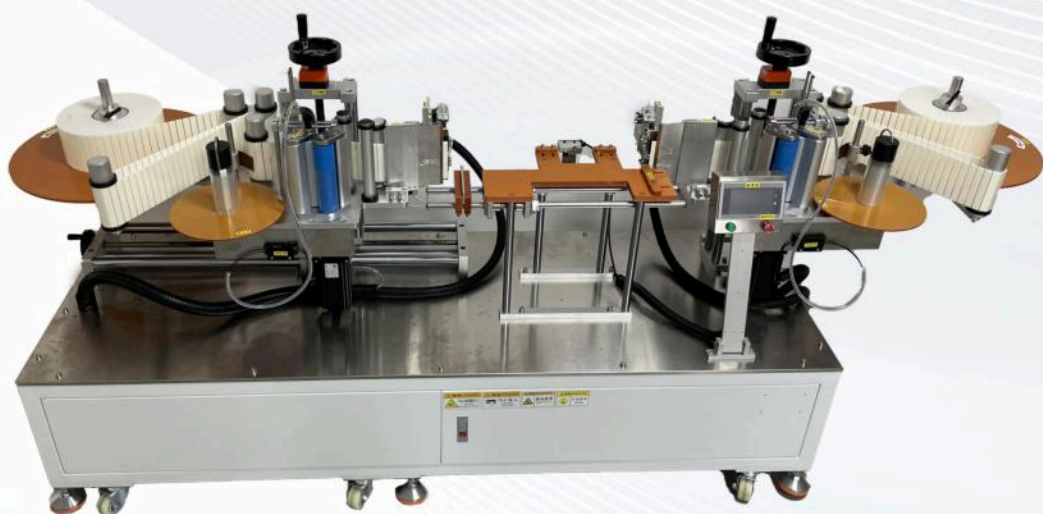

自动下料侧面+圆周贴标机



东莞市壹星自动化设备有限公司

DONGGUAN YIXING AUTOMATION EQUIPMENT CO., LTD

诚信求实
技术先行
追求卓越
与时俱进

